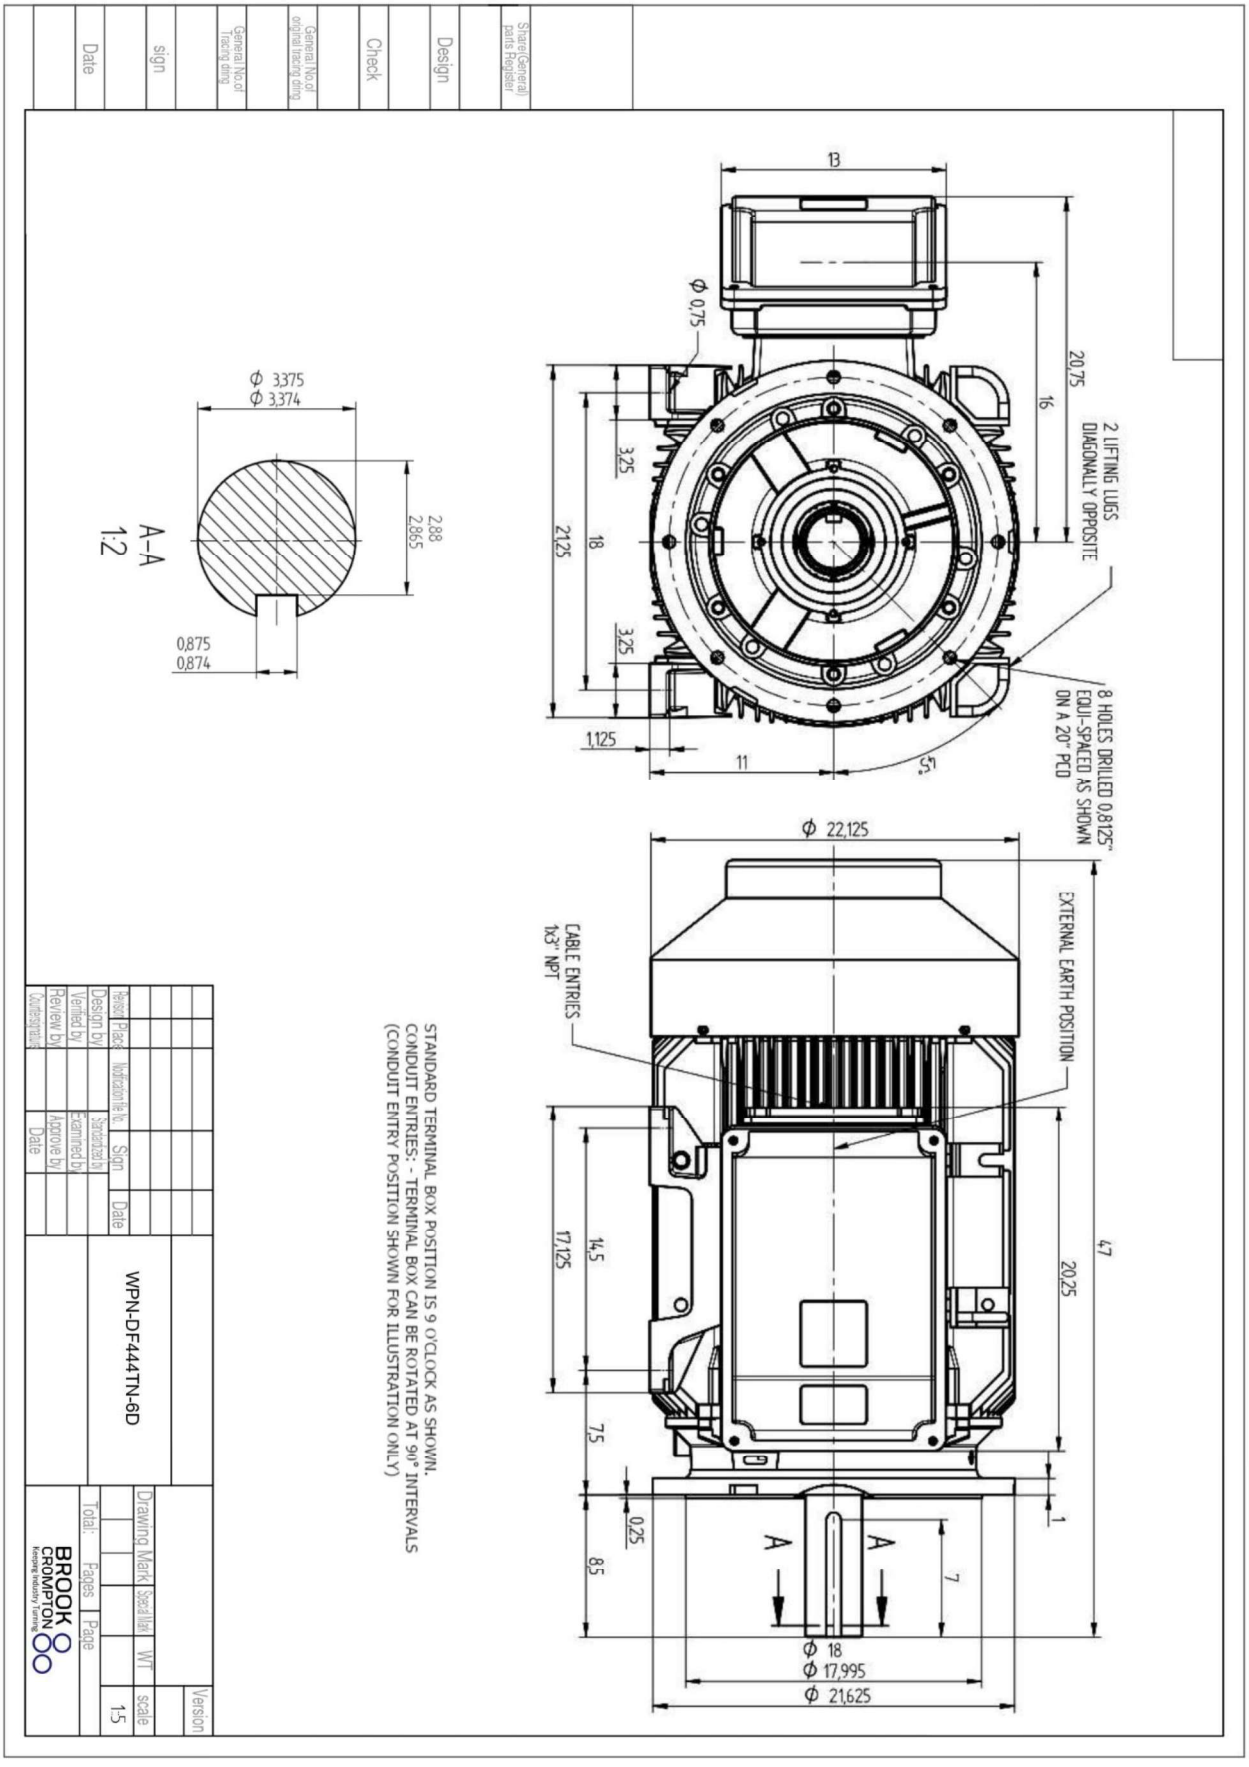
13
Φ 0,75
20,75
16
2 LIFTING LUGS DIAGONALLY OPPOSITE
3,25
2125
18
3,25
1,125
11
5°
8 HOLES DRILLED 0,8125" EQUI-SPACED AS SHOWN ON A 20° PCD
Φ 3,375
Φ 3,374
2,88
2,865
A–A
1:2
0,875
0,874
Φ 22,125
EXTERNAL EARTH POSITION
CABLE ENTRIES 1x3" NPT
47
20,25
17,125
14,5
7,5
0,25
8,5
1
A
A
7
Φ 18
Φ 17,995
Φ 21,625
STANDARD TERMINAL BOX POSITION IS 9 O'CLOCK AS SHOWN.
CONDUIT ENTRIES: - TERMINAL BOX CAN BE ROTATED AT 90° INTERVALS
(CONDUIT ENTRY POSITION SHOWN FOR ILLUSTRATION ONLY)
Design
Check
Date
sign
Drawing Mark
Total Pages
Page
WT
Scale
1:5
Version
WPN-DF444TN-6D
BROOK CROMPTON
Keeping Industry Turning