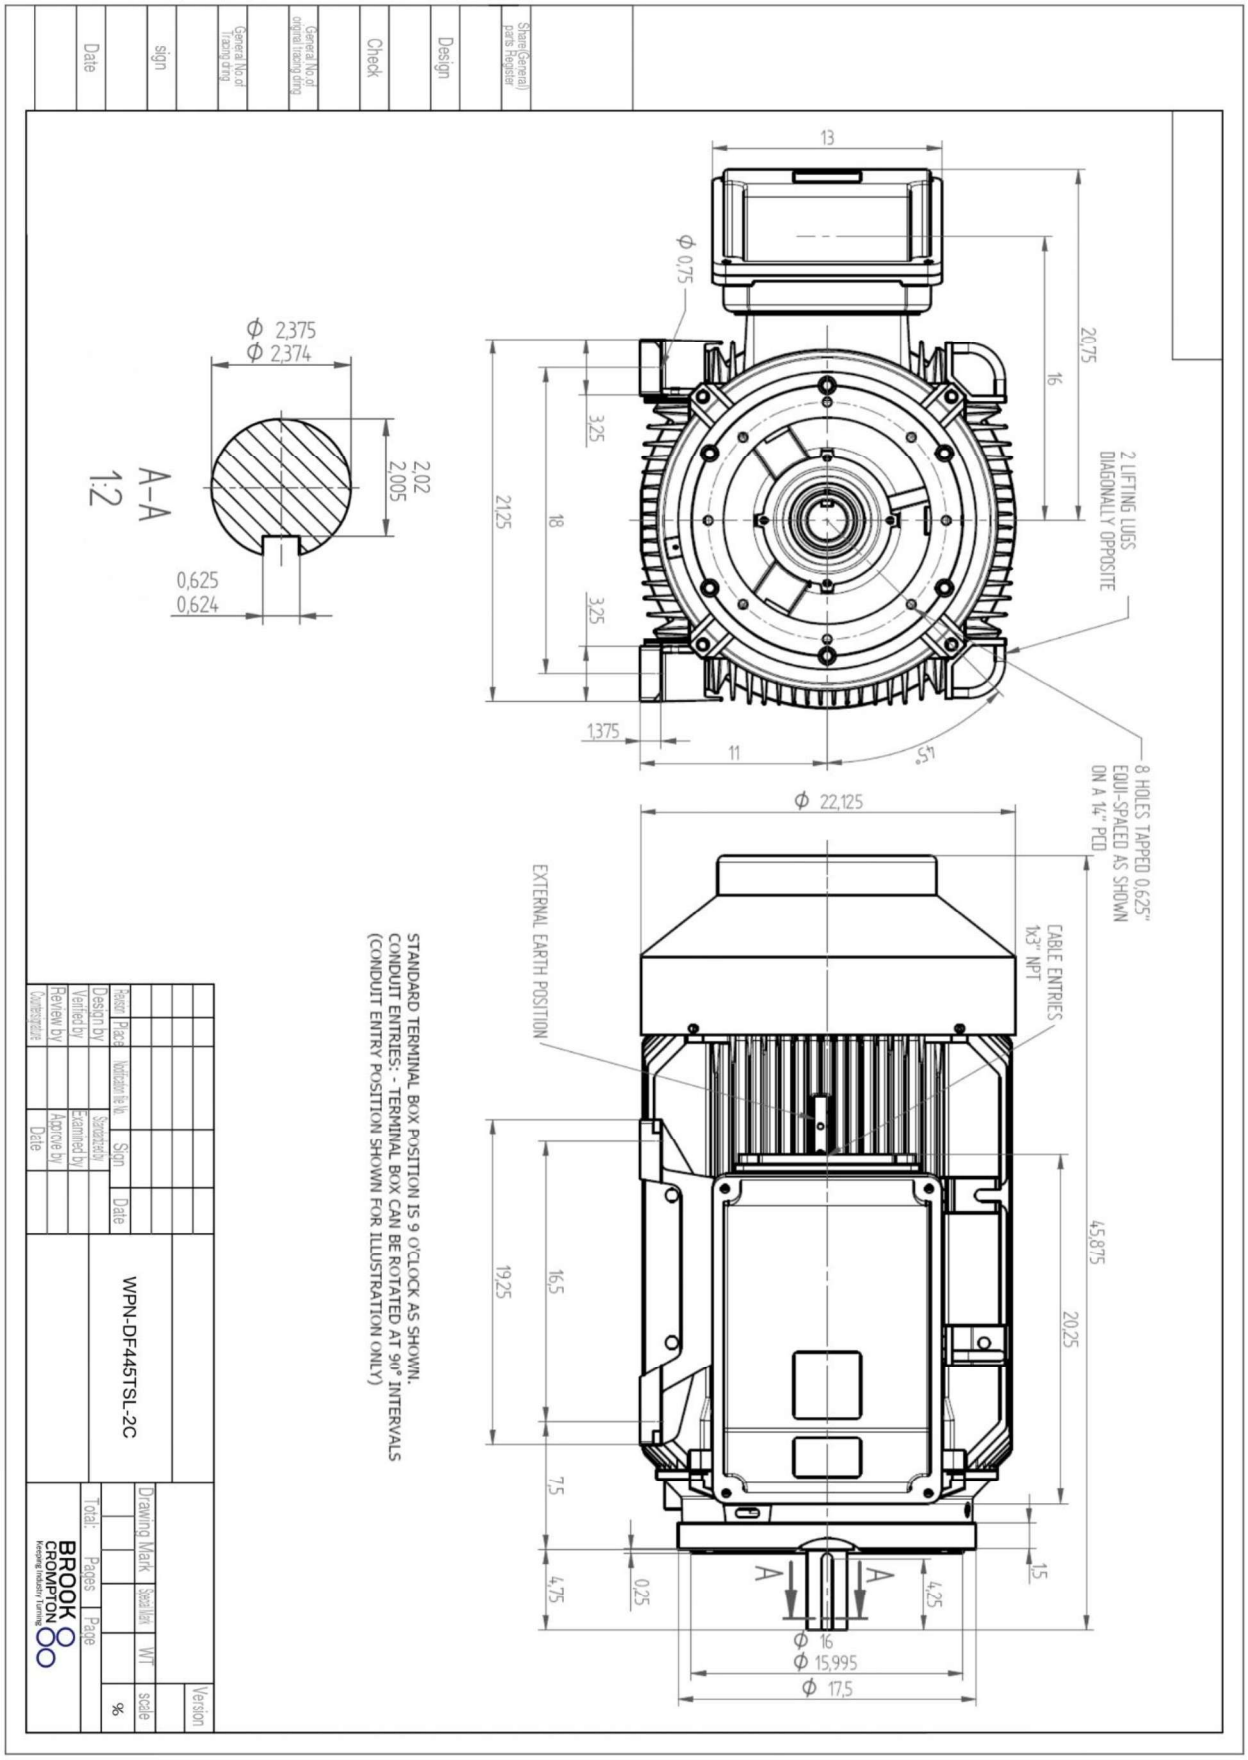
13
Φ 0,75
20,75
16
2 LIFTING LUGS
DIAGONALLY OPPOSITE
3,25
21,25
18
3,25
1,375
11
45°
8 HOLES TAPPED 0,625"
EQUI-SPACED AS SHOWN
ON A 14" PCD
Φ 2,375
Φ 2,374
2,02
2,005
A–A
1:2
0,625
0,624
Φ 22,125
EXTERNAL EARTH POSITION
CABLE ENTRIES
1x3" NPT
45,875
20,25
19,25
16,5
7,5
4,75
0,25
1,5
4,25
A
A
Φ 16
Φ 15,995
Φ 17,5
STANDARD TERMINAL BOX POSITION IS 9 O'CLOCK AS SHOWN.
CONDUIT ENTRIES: - TERMINAL BOX CAN BE ROTATED AT 90° INTERVALS
(CONDUIT ENTRY POSITION SHOWN FOR ILLUSTRATION ONLY)
WPN-DF445TSL-2C
BROOK CROMPTON
Keeping Industry Turning