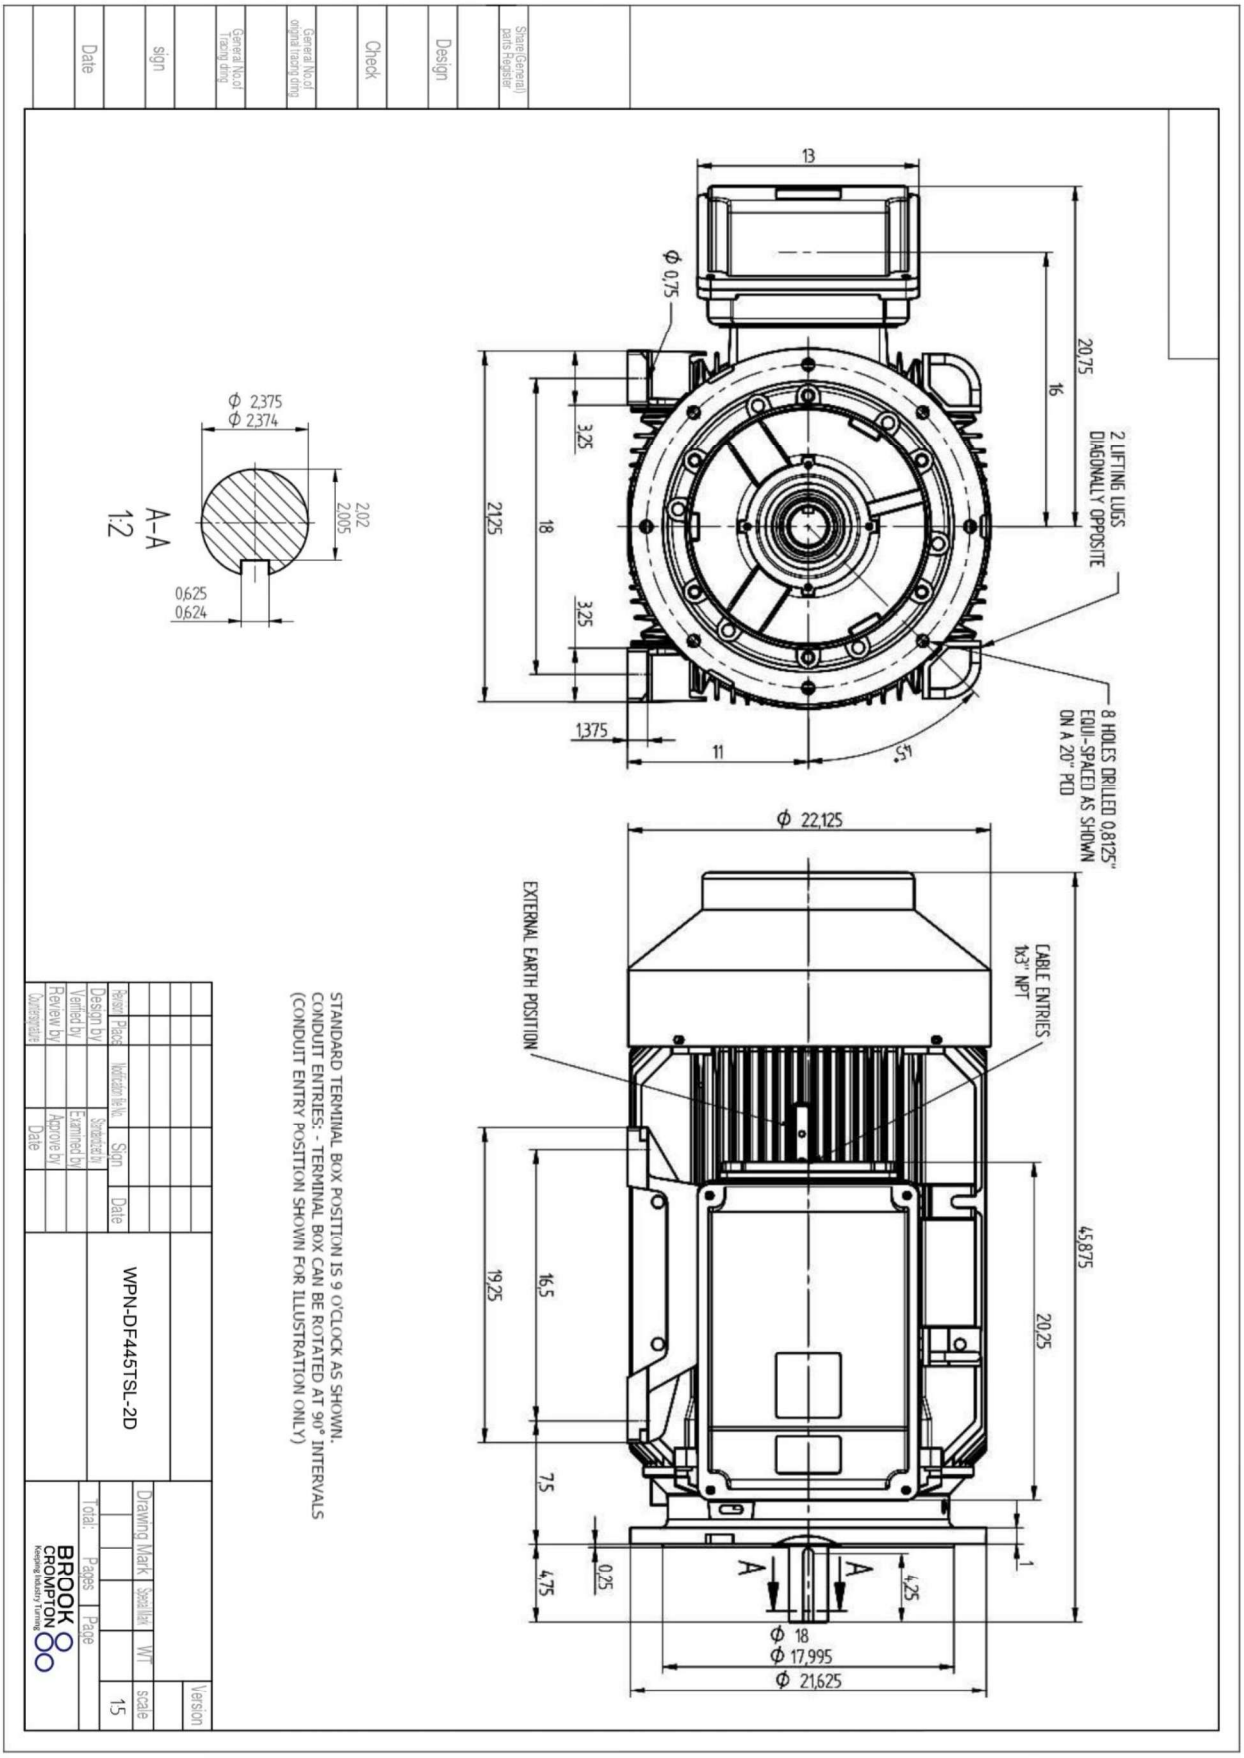
13
20,75
16
Φ 0,75
2 LIFTING LUGS
DIAGONALLY OPPOSITE
3,25
21,25
18
3,25
1,375
11
51°
8 HOLES DRILLED 0,8125"
EQUI-SPACED AS SHOWN
ON A 20" PCD
Φ 2,375
Φ 2,374
2,02
2,005
A-A
1:2
0,625
0,624
Φ 22,125
EXTERNAL EARTH POSITION
CABLE ENTRIES
1x3" NPT
45,875
20,25
19,25
16,5
7,5
4,75
0,25
1
4,25
A
A
Φ 18
Φ 17,995
Φ 21,625
STANDARD TERMINAL BOX POSITION IS 9 O'CLOCK AS SHOWN.
CONDUIT ENTRIES: - TERMINAL BOX CAN BE ROTATED AT 90° INTERVALS
(CONDUIT ENTRY POSITION SHOWN FOR ILLUSTRATION ONLY)
WPN-DF445TSL-2D
BROOK CROMPTON
Keeping Industry Turning