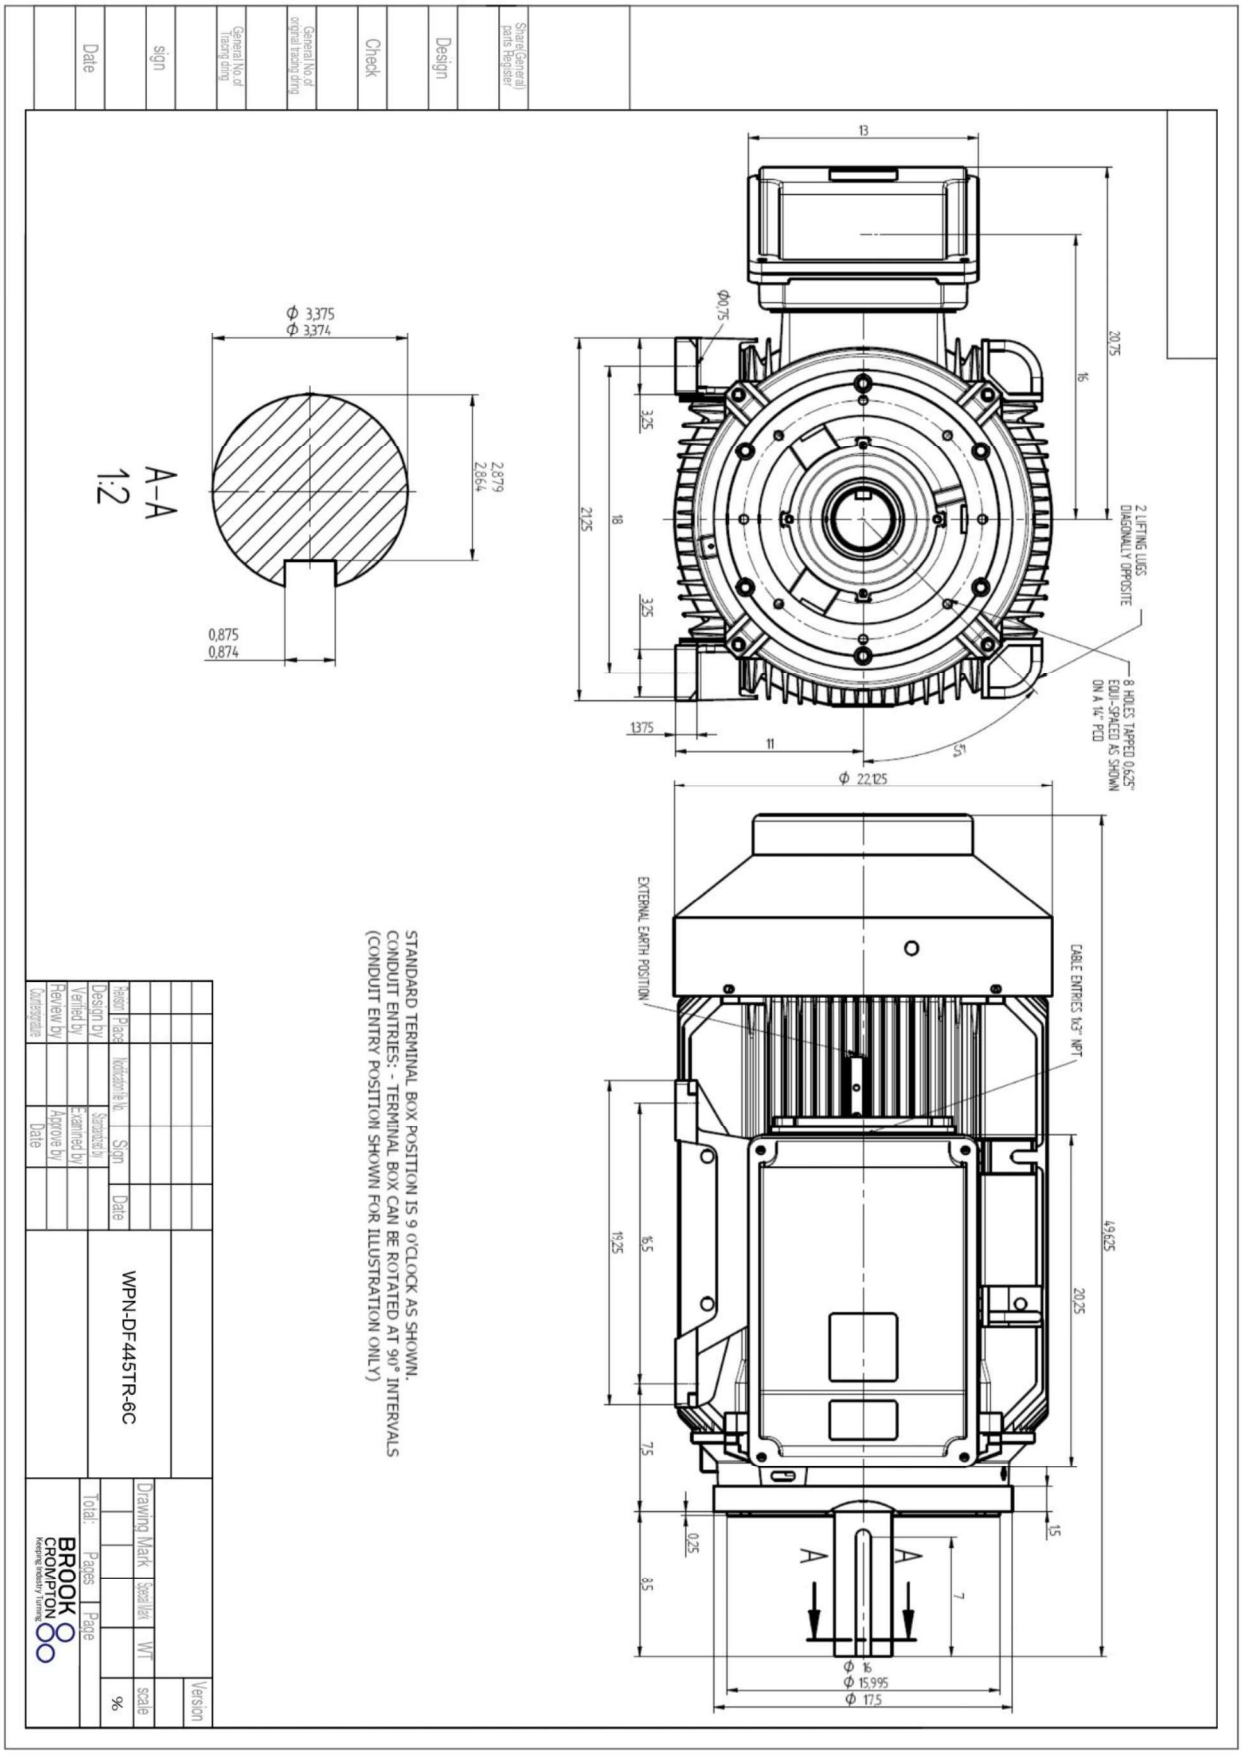
13
20.75
16
Φ0.75
3.25
21.25
18
3.25
1.375
11
Φ 22.125
2 LIFTING LUGS DIAGONALLY OPPOSITE
8 HOLES TAPPED 0.625" EQUI-SPACED AS SHOWN ON A 14" PCD
Φ 3.375
Φ 3.374
2.879
2.864
0.875
0.874
A–A
1:2
EXTERNAL EARTH POSITION
CABLE ENTRIES 1x2" NPT
49.625
20.25
19.25
16.5
7.5
0.25
8.5
1.5
7
A
A
Φ 16
Φ 15.995
Φ 17.5
STANDARD TERMINAL BOX POSITION IS 9 o'CLOCK AS SHOWN.
CONDUIT ENTRIES: - TERMINAL BOX CAN BE ROTATED AT 90° INTERVALS
(CONDUIT ENTRY POSITION SHOWN FOR ILLUSTRATION ONLY)
WPN-DF445TR-6C
BROOK CROMPTON
Keeping Industry Turning