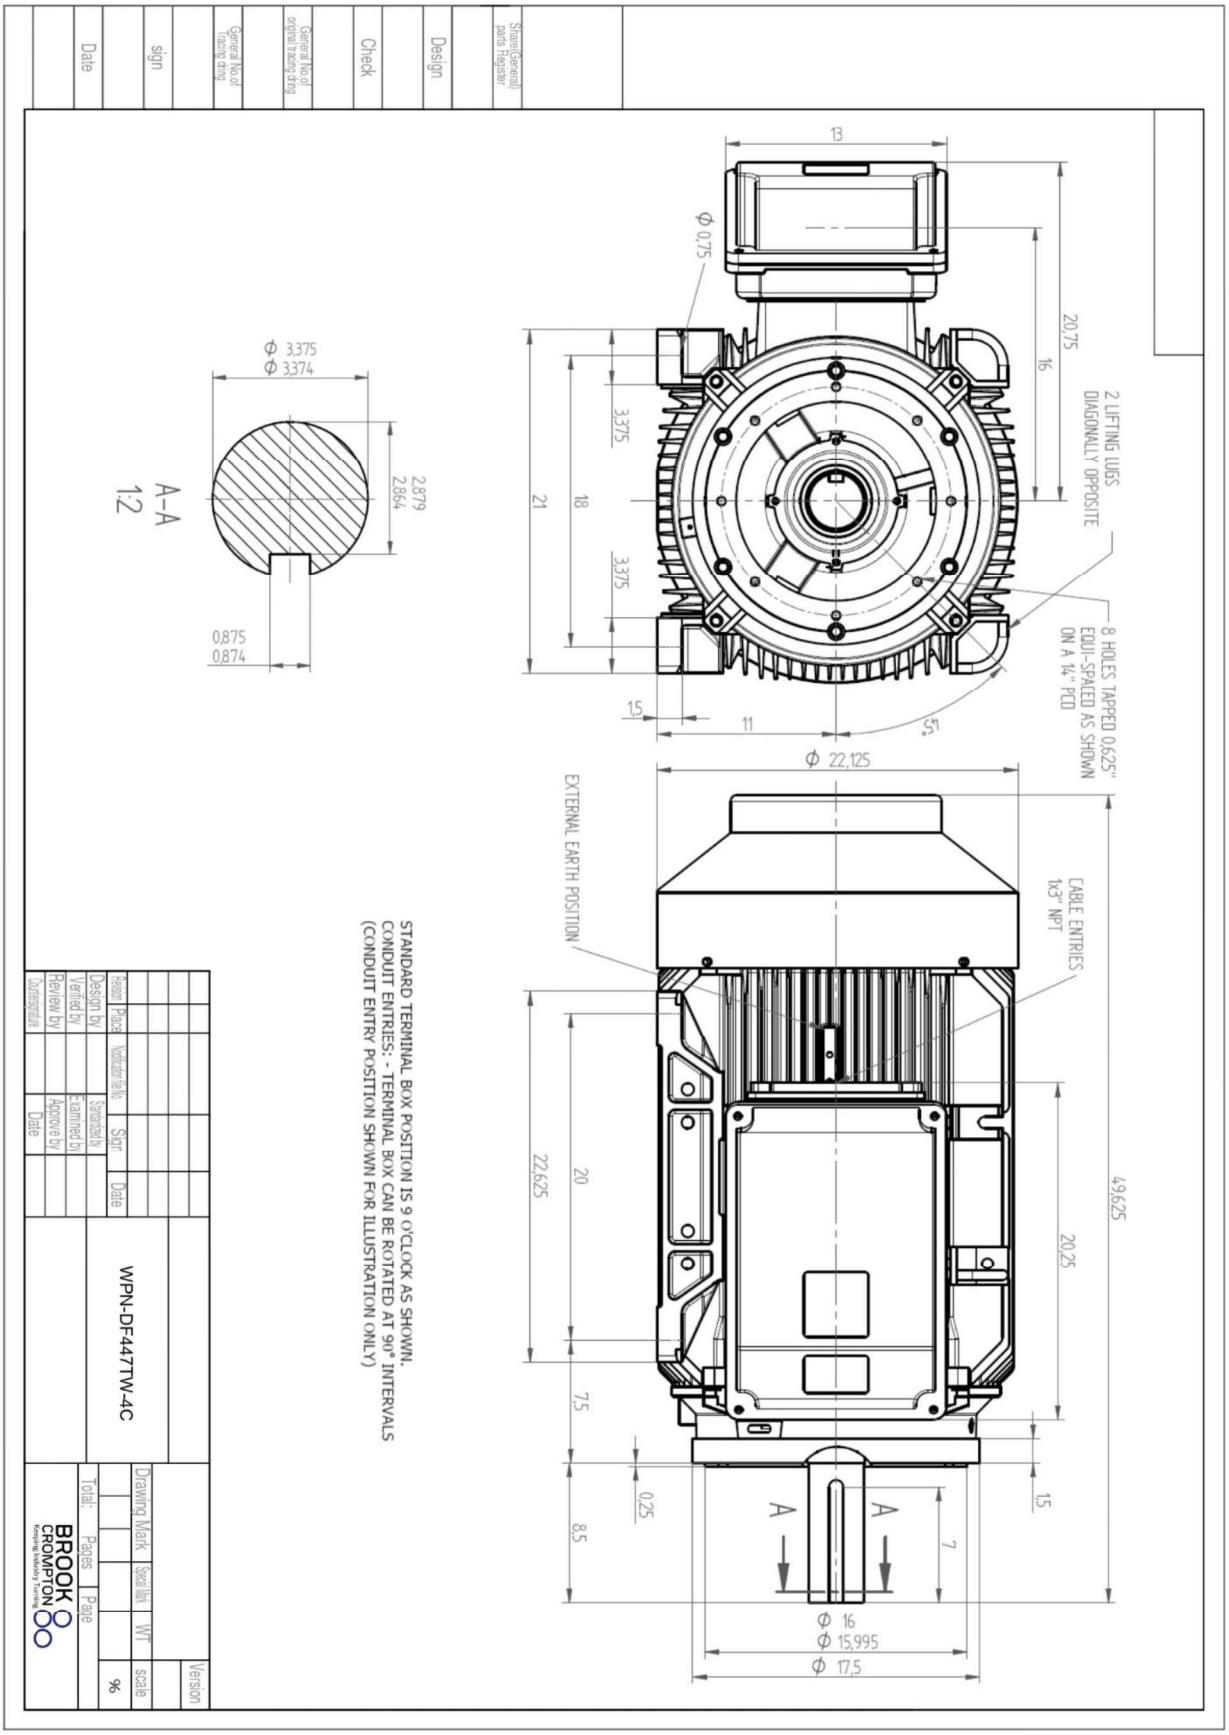
13
Φ 0,75
20,75
16
2 LIFTING LUGS
DIAGONALLY OPPOSITE
3,375
21
18
3,375
8 HOLES TAPPED 0,625"
EQUI-SPACED AS SHOWN
ON A 14" PCD
1,5
11
51
Φ 22,125
EXTERNAL EARTH POSITION
CABLE ENTRIES
1x3" NPT
49,625
20,25
22,625
20
7,5
0,25
8,5
15
7
A
A
Φ 16
Φ 15,995
Φ 17,5
Φ 3,375
Φ 3,374
2,879
2,864
A–A
1:2
0,875
0,874
STANDARD TERMINAL BOX POSITION IS 9 O'CLOCK AS SHOWN.
CONDUIT ENTRIES: - TERMINAL BOX CAN BE ROTATED AT 90° INTERVALS
(CONDUIT ENTRY POSITION SHOWN FOR ILLUSTRATION ONLY)
Stamp(General) parts Register
Design
Check
General No.of original tracing drwg
General No.of tracing drwg
sign
Date
Reason
Place
Modification No.
Sign
Date
Design by
Verified by
Review by
Authorisation
Standard by
Examined by
Approve by
Date
WPN-DF447TW-4C
Drawing Mark
Spare Part
WT
scale
%
Version
Total:
Pages
Page
BROOK
CROMPTON
Keeping Industry Turning