


DUTY MASTER ALTERNATING CURRENT MOTORS

ENCLOSURE: TOTALLY ENCLOSED
 SQUIRREL-CAGE INDUCTION
 MOUNTING: FOOT
 FRAMES 364T THRU 365TS
 WITH VERTICAL LIFTING

COOLING: NON-VENTILATED
 CAST IRON CONSTRUCTION

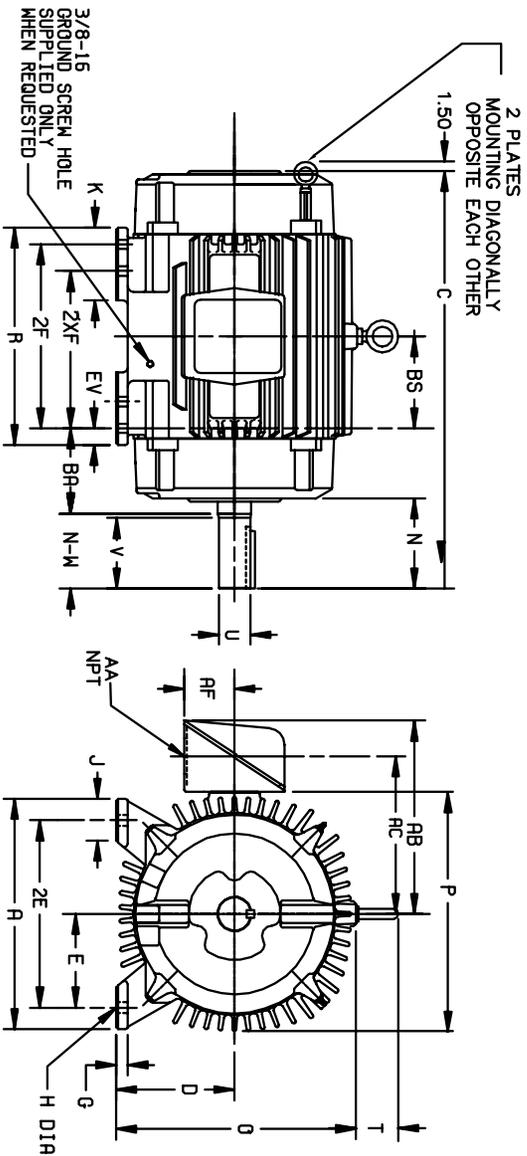

DIMENSIONS ARE IN INCHES

FRAME	A	D(2)	E	G	H	J	K	O	P	T	CAST IRON TERMINAL BOX						
364T-365TS	17.00	9.00	7.00	.88	.69	2.75	3.88	18.50	19.00	2.94	2.50	18.00	13.81	4.12			
(1)																	

FRAME SIZE	C	BS	B	2F	(A) 2XF	N	SHAFT AND KEY			WEIGHT (G)		
							N-W(6)	U(3)	V		SG.	LGTH.
364T	29.70	6.12	15.00	---	11.25	6.25	5.88	2.375	5.62	.625	4.25	810
364TS	27.58	6.12	15.00	---	11.25	4.12	3.75	1.875	3.50	.500	2.00	805
365T	29.70	6.12	15.00	---	6.25	5.88	2.375	5.82	5.62	.625	4.25	835
365TS	27.58	6.12	15.00	---	4.12	3.75	1.875	3.50	3.50	.500	2.00	830
(1)												

- (1) SPECIAL DIMENSIONS APPLYING TO THIS ORDER ON THIS LINE.
- (2) "D" VARIES — +.00, -.06.
- (3) "U" VARIES — +.000, -.001.
- (4) ALL FRAMES HAVE EIGHT MOUNTING HOLES FOR DUAL MOUNTING.
- (5) MOTOR WEIGHTS MAY VARY BY 15% DEPENDING UPON RATING.
- (6) "N-W" VARIES +.00, -.25.
- (7) OPTIONAL AUXILIARY CONDUIT BOX SUPPLIED ONLY WHEN SPECIFIED.

CONDUIT BOX LOCATED ON OPPOSITE SIDE WHEN F-2,W-1, W-4,W-5,W-7, OR C-1 MOUNTING IS SPECIFIED.
 IF MOUNTING CLEARANCE DETAILS ARE REQUIRED, CONSULT FACTORY.
 MAXIMUM PERMISSIBLE SHAFT RUNOUT WHEN MEASURED .003 T.I.R. 1.625 DIA.

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: CHG CBOX "AA" DIMENSION TO 2-1/2"	VERSION: 01	TDR: 000000717435
REV. LTR: A	REVISED: 09:52:24 10/19/2011	BY: RAGGDM
FILE: \RAG\00008\959		
MTL: -		

BALDOR

DIM SHT TENV XT FT 360T WITH VERTICAL LIFTING

FRAME _____ TYPE _____ CERTIFIED FOR _____ RPM _____ PH _____ HZ _____ VOLTS _____
 ORDER _____ ITEM _____ HP _____ APPROVED BY _____ DATE _____
 SALES ORDER _____