


PULLEY END DETAIL

OMIT LOCKWASHER USE GRAY SEALER UNDER SCREW HEADS BEFORE INSTALLING BRG RETAINER

APPLY COAT OF GRAY SEALER TO HOUSING BEFORE PRESSING IN SEAL. SEAL MUST BE PRESSED W/LIP OUT.

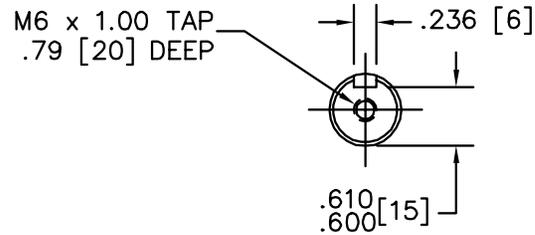

KEYWAY DETAIL

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: REVISE RED SEALER NOTE AND ALSO CHANGE TO GRAY		
REV. LTR: C	VERSION: 01	TDR: 00000939762
FILE: \AAA\00050\740	REVISED: 02:54:41 08/25/2015	BY: ENELLGO
MTL: -	⊙ □	

BALDOR

VER D80SD-D80LD TEFC 35M F2 W/SEAL, SHORT STYLE PU.EP
 SH 1 of 1

35LYQ176