



A Regal Brand

Catalog # : LM22663

Model: SRF2S1.5TC61Q40

Product Type: AC MOTOR

Stock: Non Stock

Description: 1.5HP..3600RPM.56C.TEFC.230/460V.3PH.60HZ.CONT.NOT.40C.1.0SF.RIGID-C..

Quote: Price:

Date: 10/15/2014



A Regal Brand

Catalog # : LM22663

Model: SRF2S1.5TC61Q40

Product Type: AC MOTOR


Stock: Non Stock

Description: 1.5HP..3600RPM.56C.TEFC.230/460V.3PH.60HZ.CONT.NOT.40C.1.0SF.RIGID-C..

Engineering Data					
Volts	230	Volts	460	Volts	
F.L. Amps	4.4	F.L. Amps	2.2	F.L. Amps	
S. F Amps		S. F Amps		S. F Amps	
RPM	3600	Hertz	60		
HP	1 1/2	Duty	CONTINUOUS	TYPE	TS
KW	1.12				
Frame	56C	Serv. Factor	1.0	Phase	3
Max Amb	40	Design	B	Code	H
Insul Class	F	Protection	NOT	Therm.Prot.	
Eff 100%	81	Eff 75%		PF	86
UL	V-INS, CONST UL REC	CSA	Yes	Bearing OPE	203
CC Number	EXEMPT	CE		Bearing PE	203
Load Type		Inverter Type		Speed Range	1.5 X BASE SPEED
Motor Wt.	28 LB	Enclosure	TEFC	Lubrication	STANDARD
Nameplate		Mounting	RIGID	Rotation	REV
Assembly		Shaft Dia.		Ext. Diag.	A-EE7308T-LN
Cust Part No		Outline	A-100110LN-656	Ext. Diag2	
Packaging	B	Outline Dash No		Winding	ZT239
Carton Label				GROUP :	3
Iris		Paint	LINCOLN GRAY	Test Card	
Form Factor		RMS Amps		Const Torque	Speed Range
Torque		Peak			
AB Code		Peak@DegC			
Resistance					
Connection					
Rework Status		Rework TYPE			

Hazardous Loc	NONE						Brake Motors	
Explosion Proof			Temp Op Code				FORCE	
Class			GROUP				VDC	
Class			GROUP				ADC	
								Brake Coil OHMs @25 C
Performance								
Torque UOM						Inertia (WK²)		
Torque								
CURRENT (amps)								
Efficiency (%)								
PowerFactor								
Load Curve Data @60 HzVolts,1 1/2Horsepower								
Load	Amps	KW	RPM	Torque	Eff	PF	Rise By Resis	Frame Rise
0.0	0.87	1.4	3600	0.0	0.0	8.5	0.0	-
0.25	1.0	0.42	3565	0.55	66.0	51.5	0.0	-
0.5	1.3	0.73	3535	1.1	77.0	70.5	0.0	-
0.75	1.7	1.1	3500	1.7	80.0	80.0	0.0	-
1.0	2.2	1.4	3450	2.3	81.0	86.0	60.0	-
1.25	2.5	1.8	3420	3.0	79.0	87.5	0.0	-
1.5	-	0.0	0	0.0	0.0	0.0	0.0	-
2.0	-	0.0	0	0.0	0.0	0.0	0.0	-
1.0	2.2	1.4	3450	2.3	0.0	0.0	0.0	-
SOURCE: CALCULATED GROUP: 3								
Load Curve Data @60HzVolts,1 1/2Horsepower								
Load	Amps	KW	RPM	Torque	Eff	PF	Rise By Resis	Frame Rise
Load Curve Data Not Available								
Quote:		Price:						
Date: 10/15/2014								

100110LN

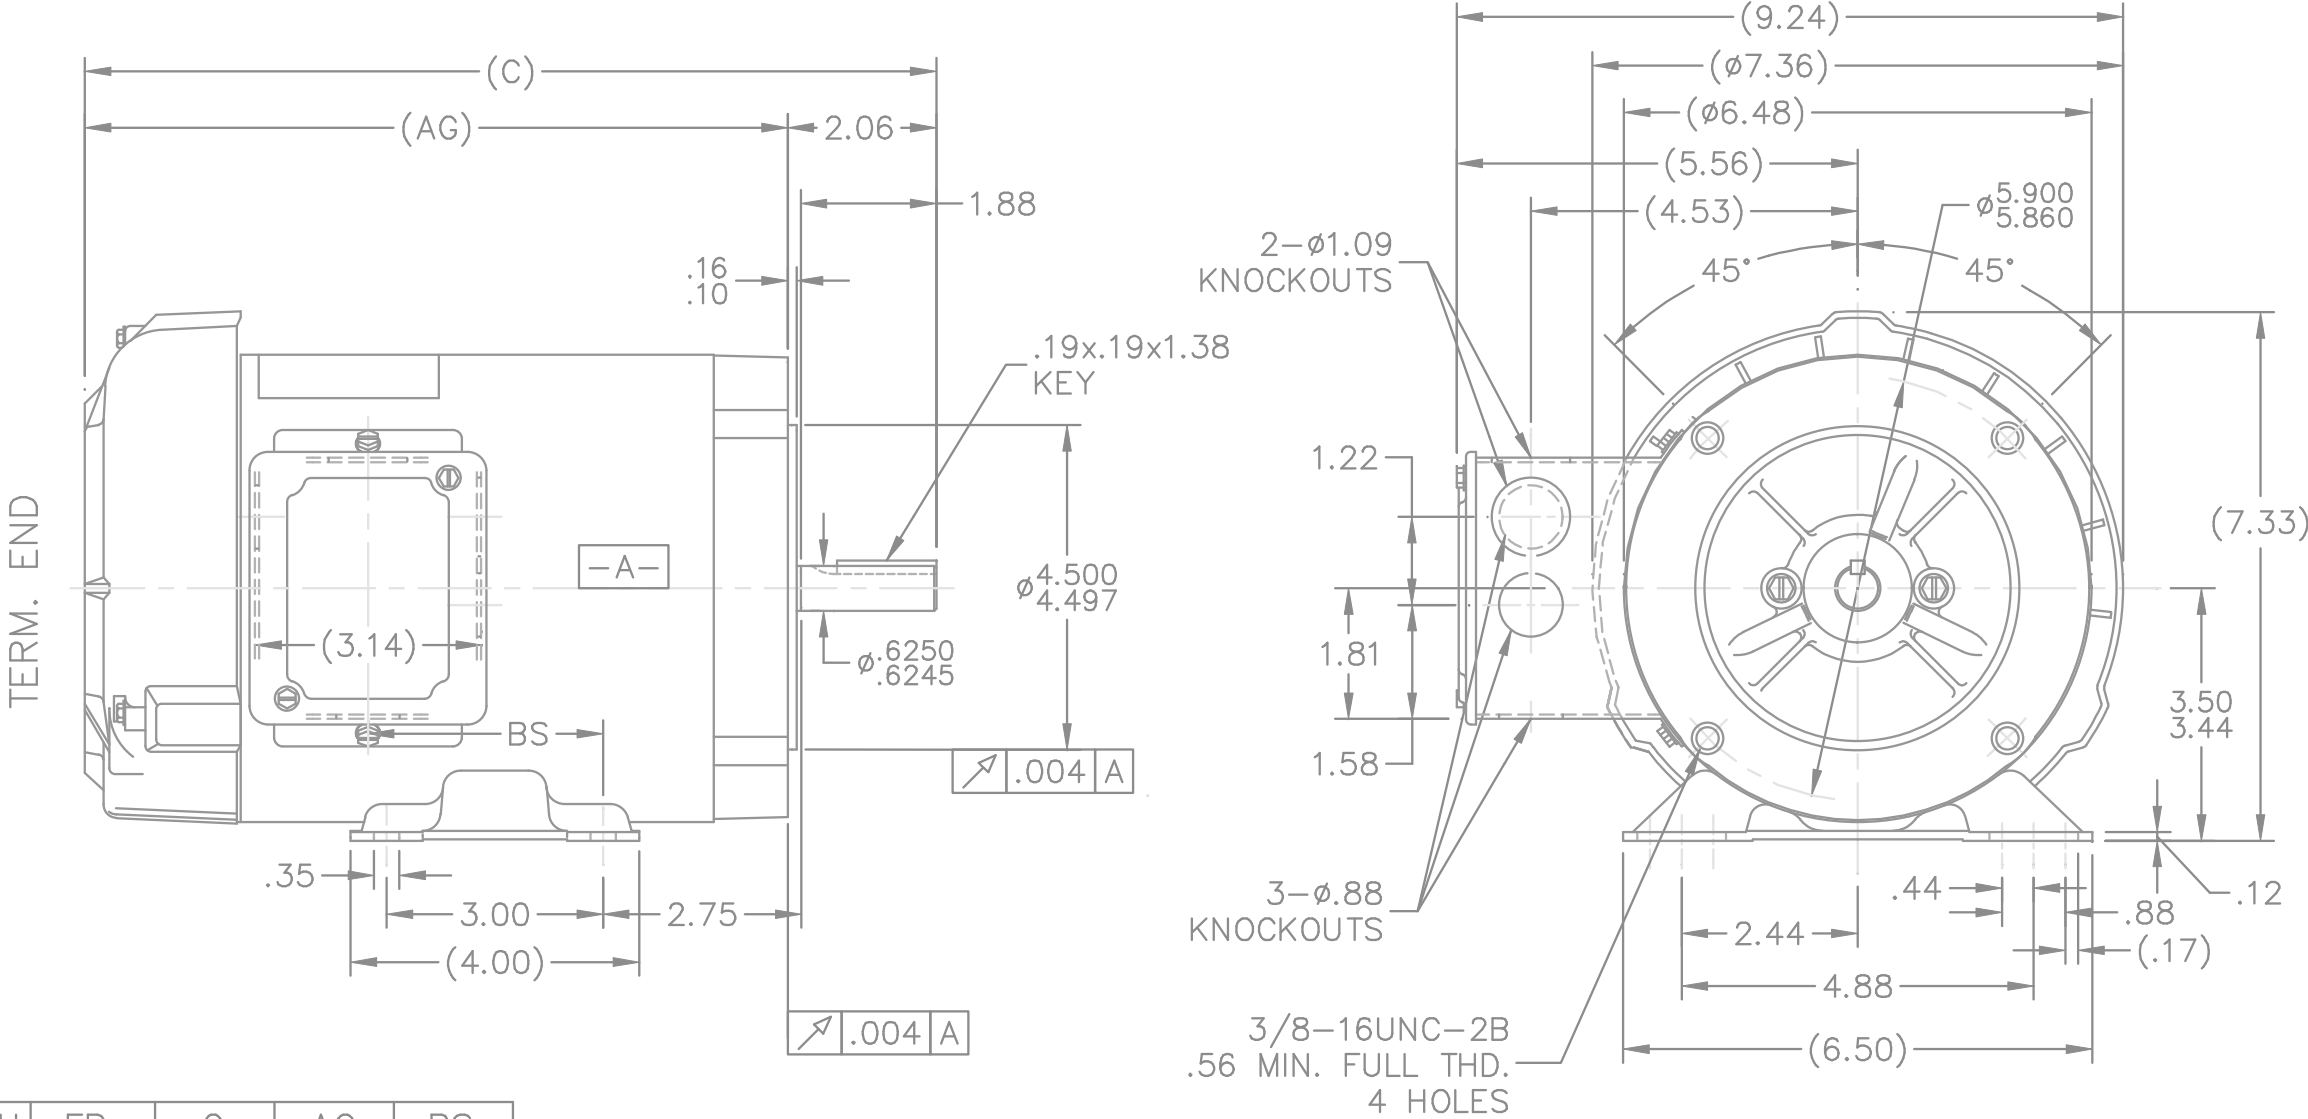


- NOTES:
1. CONDUIT BOX CAN BE ROTATED 180°.
2. NAMEPLATE READ FROM CONDUIT BOX SIDE OF MOTOR.

DASH	FR.	C	AG	BS
606	56-60	11.31	9.25	2.75
656	56-65	11.81	9.75	3.25
706	56-70	12.31	10.25	3.75
756	56-75	12.81	10.75	4.25

06-01-2000


			TOLERANCES UNLESS SPECIFIED			DRAWN BLR 06-10-1999		
			DEC.	INCHES		CHK	ML	06-18-1999
			.X	±.1		APPD	GK	06-18-1999
			.XX	±.03		SCALE	5=16	
2	ADDED NAMEPLATE LOC. CN27400-296	BLR 08-05-1999	.XXX	±.005	TITLE OUTLINE 56 FRAME - TEFC - C'FACE	REF		
1	NEW DRAWING	BLR 06-18-1999	.XXXX	±.0005	MAT'L.	FMF		
NO.	REVISION	BY & DATE	CHK	ANG	±7'30"	FINISH	PREV	
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT			RFP	06-18-1999	CAD FILE 100110ln	SIZE A	DRAWING NO. 100110LN	PAGE 1 OF 1
			DIST	WP				REV. 2

HIGH VOLTAGE

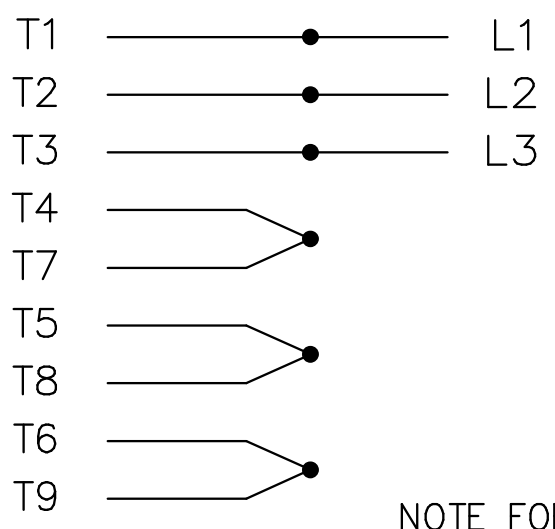


NOTE FOR FACTORY USE ONLY:
TO SURGE TEST FOR COMMON CONNECT:
HIGH VOLT: CONNECT P1 TO T1
THEN P2 TO L1
LOW VOLT: CONNECT P1 TO T1 & T7,
THEN P2 TO L1

LOW VOLTAGE

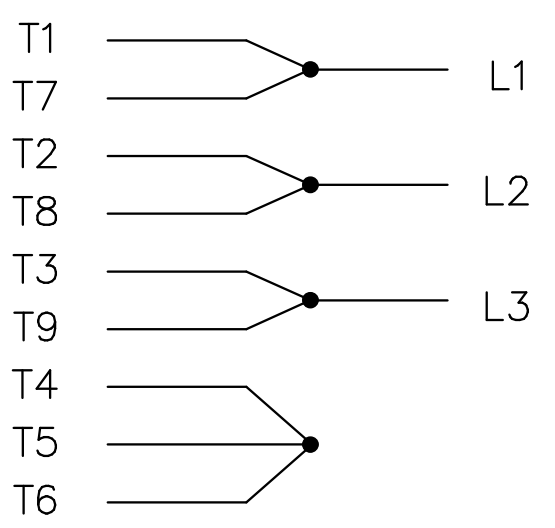

THREE PHASE
DUAL VOLTAGE MOTOR

EE7308T-LN

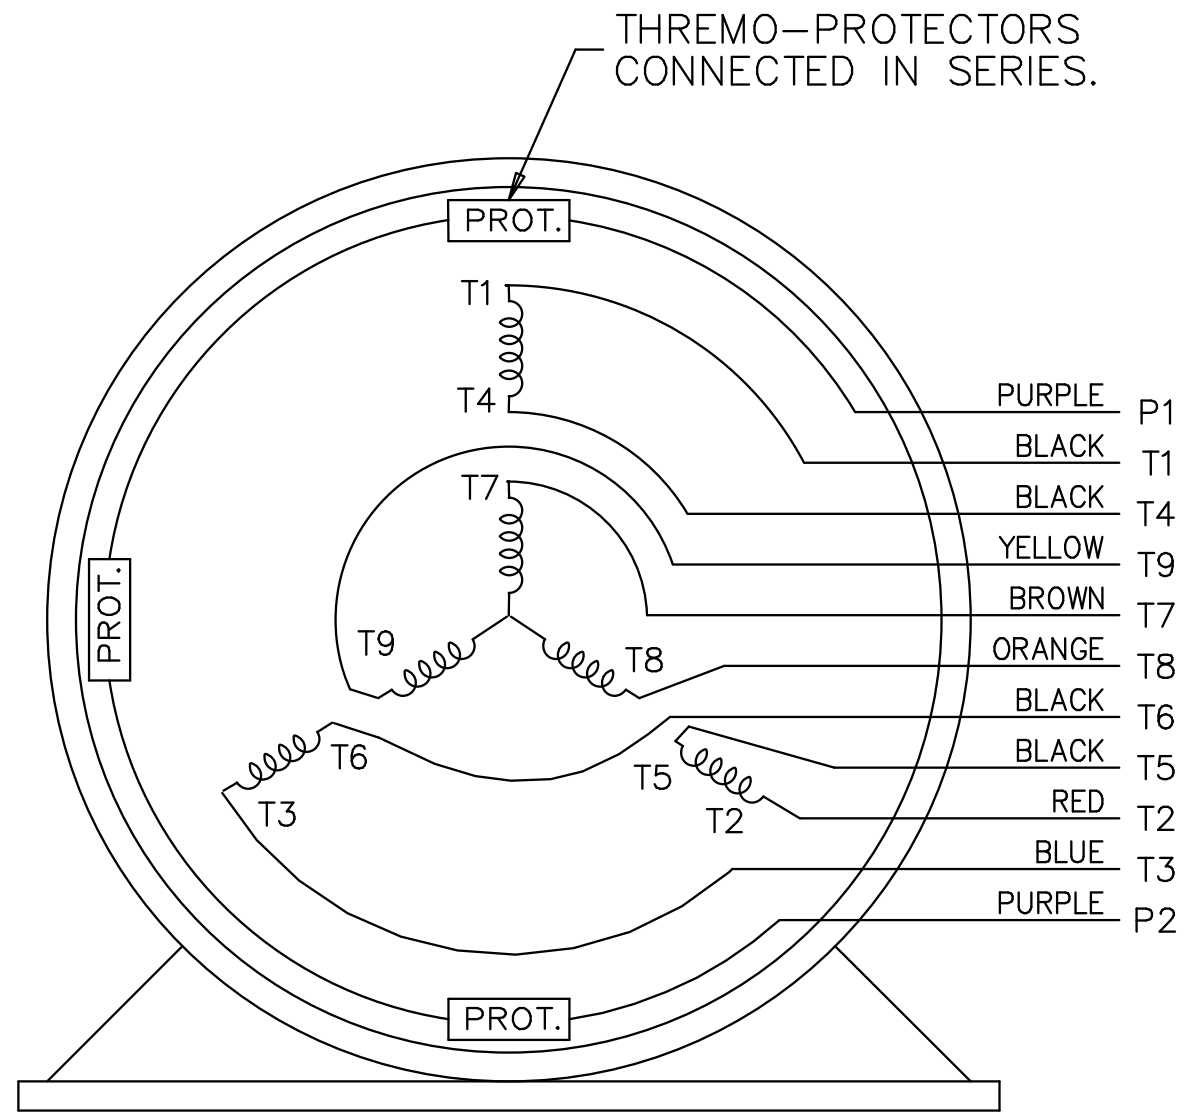

VIEW OF TERMINAL END

				TOLERANCES UNLESS SPECIFIED			DRAWN BJK 07-16-2002				
				DEC.	INCHES		CHK	DRS	07-18-2002		
				.X	±.1		APPD	GK	07-18-2002		
				.XX	±.02		TITLE CONNECTION DIAGRAM				
2	ADDED COLORS TO "T & P" LEADS	CN 40494	MSG 08-08-2006	ML	.XXX	±.005	3 PHASE – DUAL VOLTAGE MOTOR				
1	NEW DRAWING	BJK 07-18-2002	DRS	.XXXX	±.0005	MAT'L.	REF				
NO.	REVISION	BY & DATE	CHK	ANG	±7'30"	FINISH	FMF				
						PREV					
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT – DO NOT SCALE THIS PRINT			RFP			CAD FILE ee7308t_ln		SIZE	DRAWING NO.	PAGE OF	REV.
			DIST LB					A	EE7308T-LN		2

7/19/2007 9:24:35 AM