



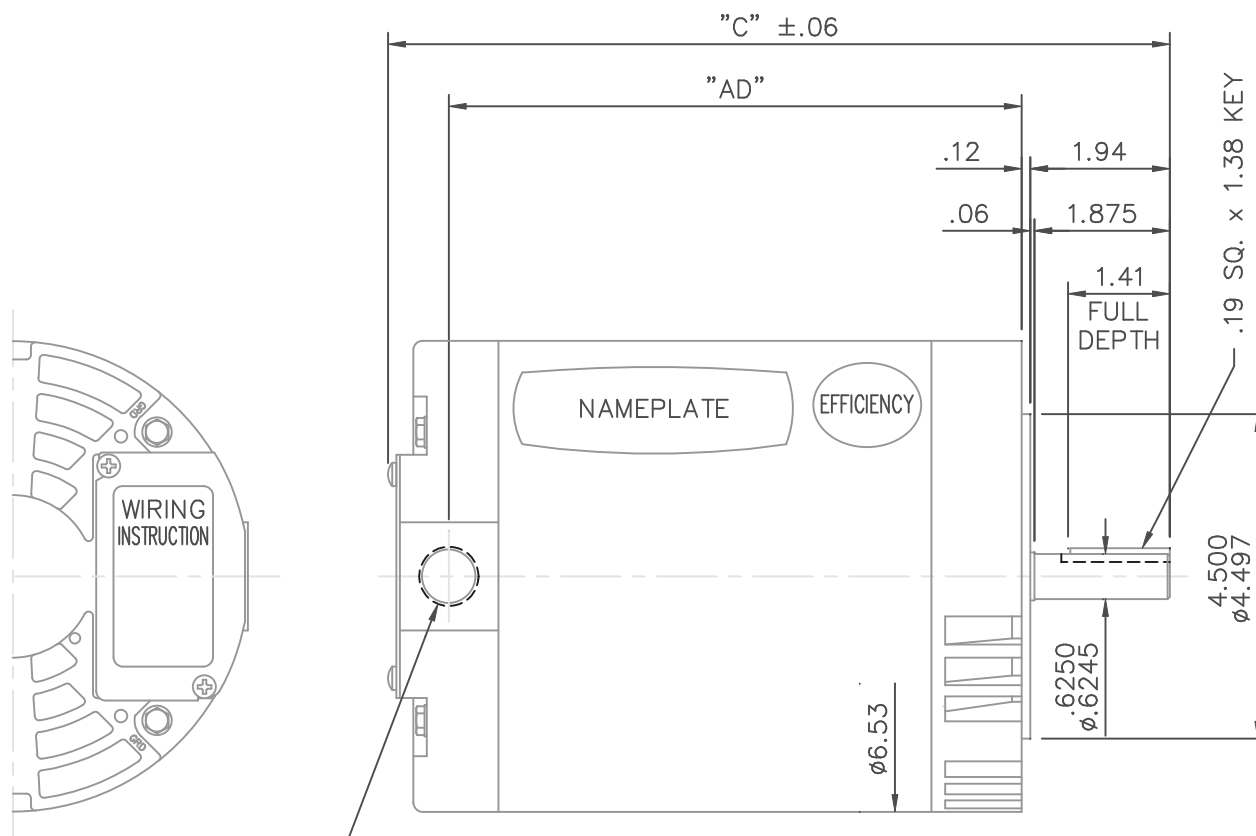

(1) 1/2-14 NPT
(PLUGGED)

DASH NO.	"C"	"AD"
500	9.84	6.94
550	10.34	7.44
600	10.84	7.94
650	11.34	8.44
700	11.84	8.94
750	12.34	9.44
800	12.84	9.94

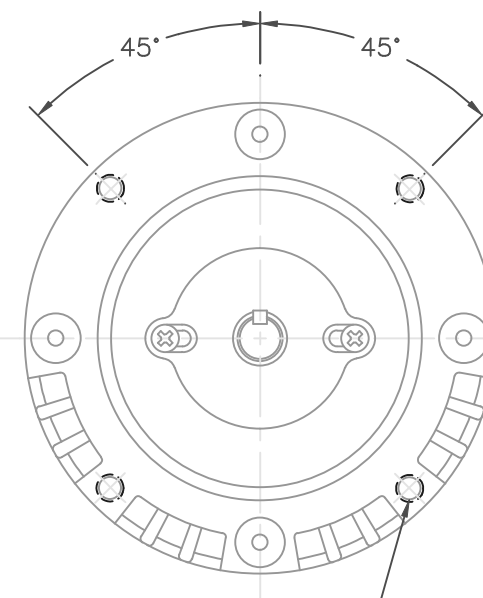

(4) 3/8-16 UNC-2B X .56
DEEP ON A Ø5.875 B.C.

MAXIMUM FACE RUNOUT .004 T.I.R.
MAXIMUM PILOT ECCENTRICITY .004 T.I.R.
PERMISSIBLE SHAFT RUNOUT .002 T.I.R.

TOLERANCES
UNLESS SPECIFIED

DEC. INCHES

.X ±.1

.XX ±.03

.XXX ±.005

.XXXX ±.0005

ANG ±1/2°



ELECTRIC MOTORS
GEARMOTORS
AND DRIVES

TITLE
OUTLINE - 56C FRAME
DRIP PROOF - "C" FACE

MAT'L.

FINISH

DRAWN BJB 06/04/03

CHK

APPD RDW 06/04/003

SCALE 3=8

REF

FMF

PREV

01	ADDED "DASH NO." 700, 750, & 800	BJB 06/10/04
NO.	REVISION	BY & DATE

THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT
IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED
THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT

RFP
DIST BRF-NLV

CAD FILE 034998

SIZE
A

DRAWING NO.
034998

REV.
01