


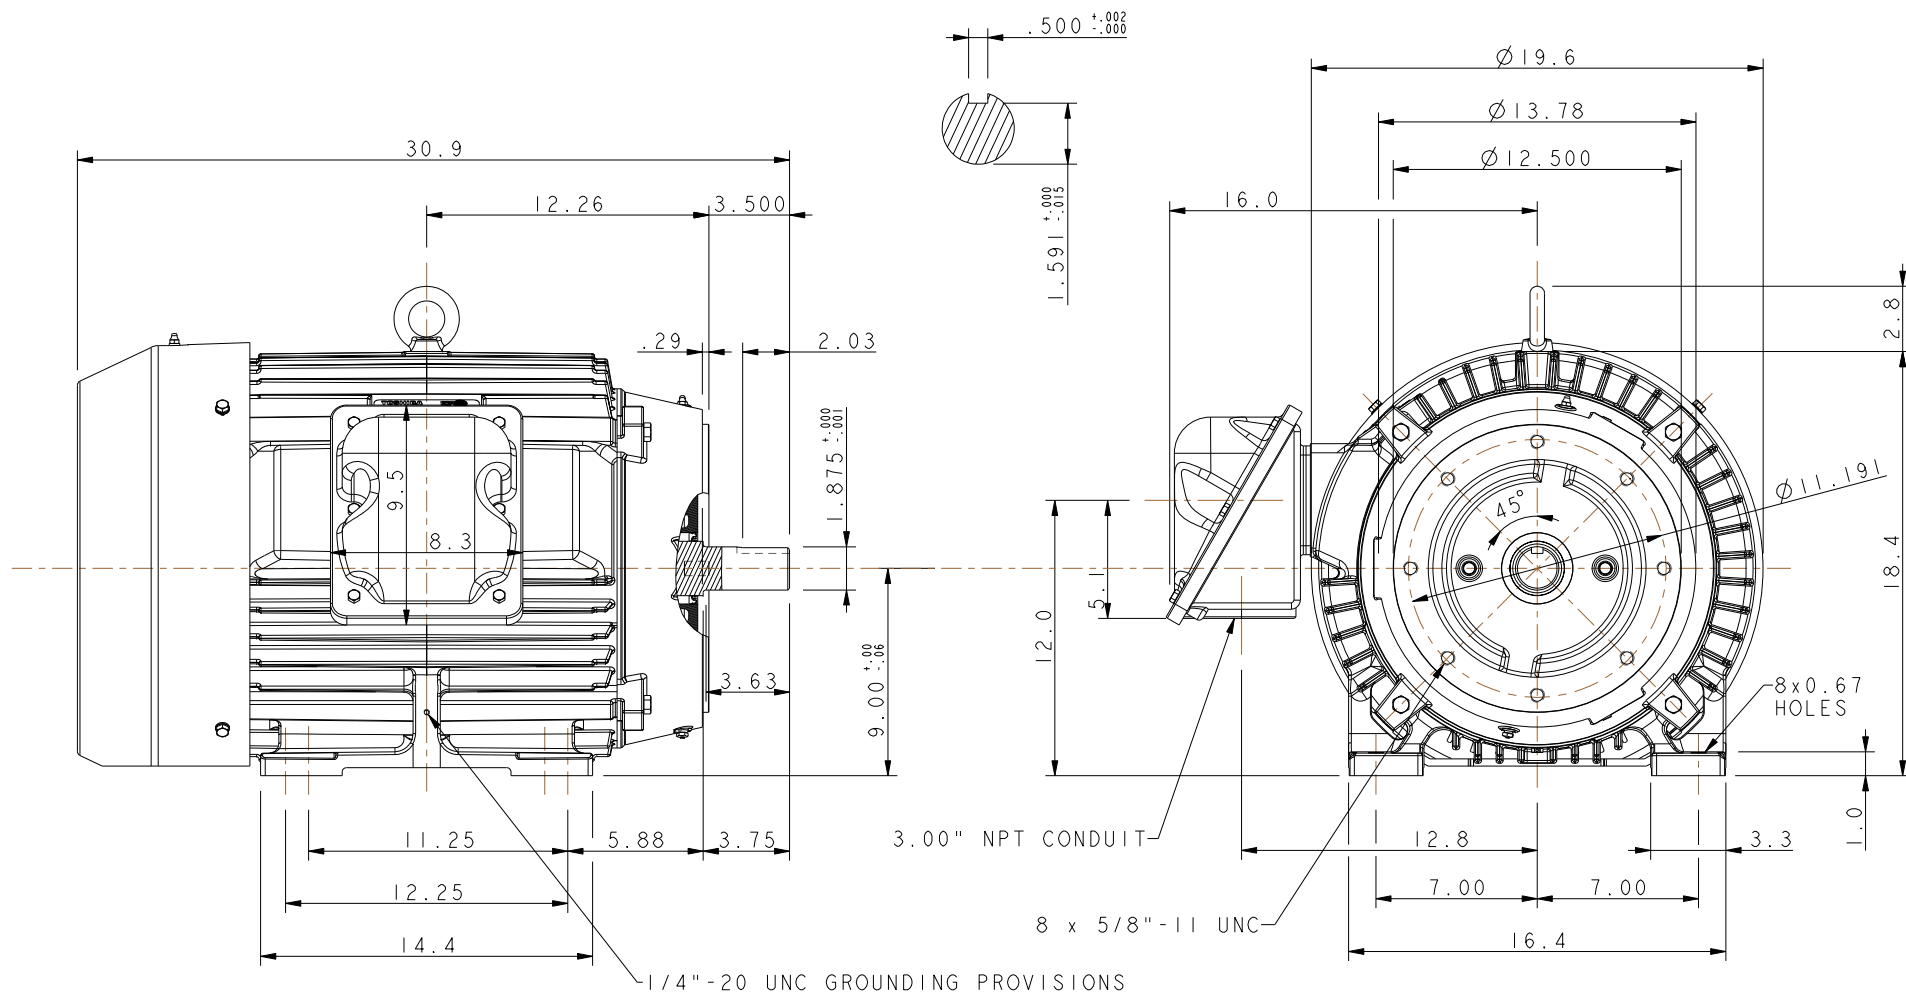

- NOTES:
1. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS
 2. STANDARD PRODUCT USE BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE.
 3. KEY DIMENSIONS EQUAL 0.500" x 0.500" x 2.00" (MOTOR SUPPLIED WITH KEY)

UNITS: INCHES

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT WITHOUT NOTICE. DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS CERTIFIED.

360TSC TEFC FRAME F1 ASSEMBLY		TOLERANCES								EQP Global 841 XT SERIES	
		.X .1									
MDSLV086-07		.XX .03								DRAWN BY: <u>N. MOMIN</u>	
		.XXX .005									CHECK BY: _____
TOSHIBA TOSHIBA INTERNATIONAL CORPORATION		.XXXX .0005								APPROVED BY: _____ www.toshiba.com/ind	
		MAXIMUM MOTOR WEIGHT									
		893 lbs.	1	ADDED KEY DIMENSIONS				S. CLANCY	08/10/12		
		405 kgs.	0	FIRST ISSUE				N. MOMIN	12/14/10		
			NO	REVISION				DRAWN BY	DATE	CHECK	

DRAWN BY: **N. MOMIN**
 CHECK BY: _____
 APPROVED BY: _____
www.toshiba.com/ind

TOSHIBA INTERNATIONAL CORPORATION Industrial Division / Houston Motor Plant SQUIRREL CAGE INDUCTION MOTOR PERFORMANCE SPECIFICATIONS	INDEX	MPCF-1033
	SHEET NO.	1 of 1
	ISSUED	11/08/96
	SUPERSEDES	10/06/95
	REVISION	1
	WRITTEN BY	R. EVANS
	APPROVED BY	<i>Jay Bugbee</i>

Customer Tag:

CUSTOMER:

TIC SR No.:

Customer PO:

MOTOR NAMEPLATE DATA				
H.P.: 75	VOLTS: 575	3 Ø / 60	Hz	S. RPM: 3600
FRAME: 365TSC	ENCL: TEFC	FLAMPS: 68.8		FLRPM: 3550
FORM: FCKL1	S.F.: 1.15	NEMA DESIGN: B		INSUL CLASS: F
TYPE: TKKH	AMB.: 40C	CODE: G		DUTY: CONT.
MODEL No.: 0752XDSC42B-P		kW: 55		Serial No.:
NOM. EFF.: 93.6	MIN. EFF.:	P.F.: 89.0		

AMPERAGE	TORQUES	** BEARINGS:
Locked Rotor: 433	FULL LOAD (lb-ft.): 110.9	Drive End: 6312C3
	LOCKED ROTOR (%): 198	Opposite Drive End: 6312C3
	BREAK DOWN (%): 253	

EFFICIENCY (%)	POWER FACTOR (%)
FULL LOAD: 93.8	FULL LOAD: 89.9
3/4 LOAD: 93.3	3/4 LOAD: 88.7
1/2 LOAD: 91.7	1/2 LOAD: 84.8

ALL CHARACTERISTICS ARE AVERAGE EXPECTED VALUES BASED UPON RATED VOLTAGE, FREQUENCY AND SINEWAVE POWER INPUT. * TEMPERATURE RISE WILL BE CONSISTENT WITH INSULATION, AMBIENT AND SERVICE FACTOR AS DEFINED BY NEMA-MG-12.43 OR -20.40. ** BEARINGS ARE THE ONLY RECOMMENDED SPARE PART(S).
--

CERTIFIED BY:
DATE:


TOSHIBA INTERNATIONAL CORPORATION

Speed Torque/Current Curve

Model #:	0752XDSC42B-P			FLAmps:	69
Enclosure:	TEFC	Voltage:	575 V	Frame:	365TSC
Pole:	2	Frequency:	3 PH / 60 Hz	Ins. Class:	F
HP:	75	Rotor Inertia:	12.6 lb-ft ²	Date:	7-May-2012
FLRPM:	3550	Load Inertia:	N/A	File:	KH2075C

Locked Rotor Amps:	434	Load Type:	N/A
Locked Rotor Torque:	195%	Starting at:	N/A
Breakdown Torque:	250%	Accel. Time:	N/A
Rated Torque:	111 lb-ft		

Design Values

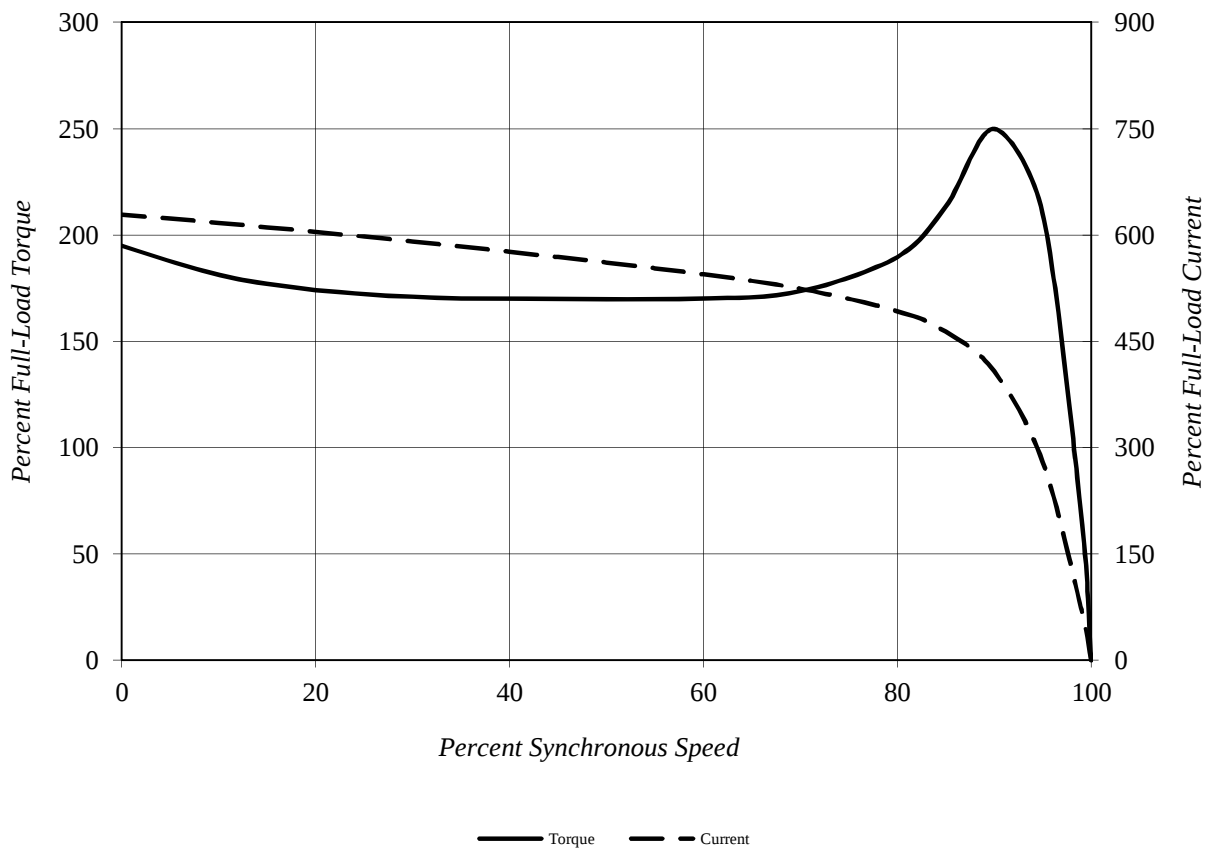

Comments: _____

D.E. Curve #: _____

Prepared by: **Van Truong**

Checked by: _____

TOSHIBA

Reliability in Motion

TOSHIBA INTERNATIONAL CORPORATION

INDUSTRIAL DIVISION

PO BOX 40906

HOUSTON TX 77240

(713) 466-0277

(800) 231-1412

FAX (713) 466-8773

SPARE PARTS (RECOMMENDED)

OTHER THAN THE GREASE USED FOR RE-GREASABLE BEARINGS, **TOSHIBA** ADVISES THAT THERE ARE NO "USE" PARTS. THE ONLY INSURANCE SPARES THAT **TOSHIBA** SUGGESTS FOR THESE SQUIRREL CAGE INDUCTION MOTORS ARE INDUSTRY STANDARD, AND COMMERCIALY AVAILABLE ANTI-FRICTION BEARINGS, AS NOTED BELOW.

MOTOR COMPONENTS (SUCH AS TERMINAL BOXES, FAN COVERS, MACHINED PARTS) ARE AVAILABLE UPON SPECIAL REQUEST. IN THIS CASE, PLEASE ADVISE OUR ORDER ENTRY DEPARTMENT THE MODEL AND SERIAL NUMBERS (FOUND ON THE MOTOR NAMEPLATE) , AND A DESCRIPTION OF THE COMPONENT REQUIRED. THEY WILL THEN FURNISH THE CURRENT PART NUMBER, PRICE AND AVAILABILITY.

(NOTE: OUR INTERNAL PART NUMBERS ARE SUBJECT TO CHANGE WITHOUT NOTICE, AND ARE NOT PUBLISHED).

PLEASE ADVISE IF YOU HAVE ANY QUESTIONS.

CUSTOMER:

PURCHASE ORDER #

Customer Tag:

TOSHIBA FILE #

MODEL # **0752XDSC42B-P**

HP / RPM / ENCL / FRAME: **75** / **3600** / **TEFC** / **365TSC**

DRIVE END BEARING: **6312C3**

OPPOSITE DRIVE END BEARING: **6312C3**

Prepared By:

Date:

Motor Connection Diagram
3 Leads - Delta Connection

Switch L1 and L2 to reverse rotation

Each lead may consist of more than one cable.
If multiple cables represent a single lead, each one
of them will be labeled with the appropriate lead number.