


034293

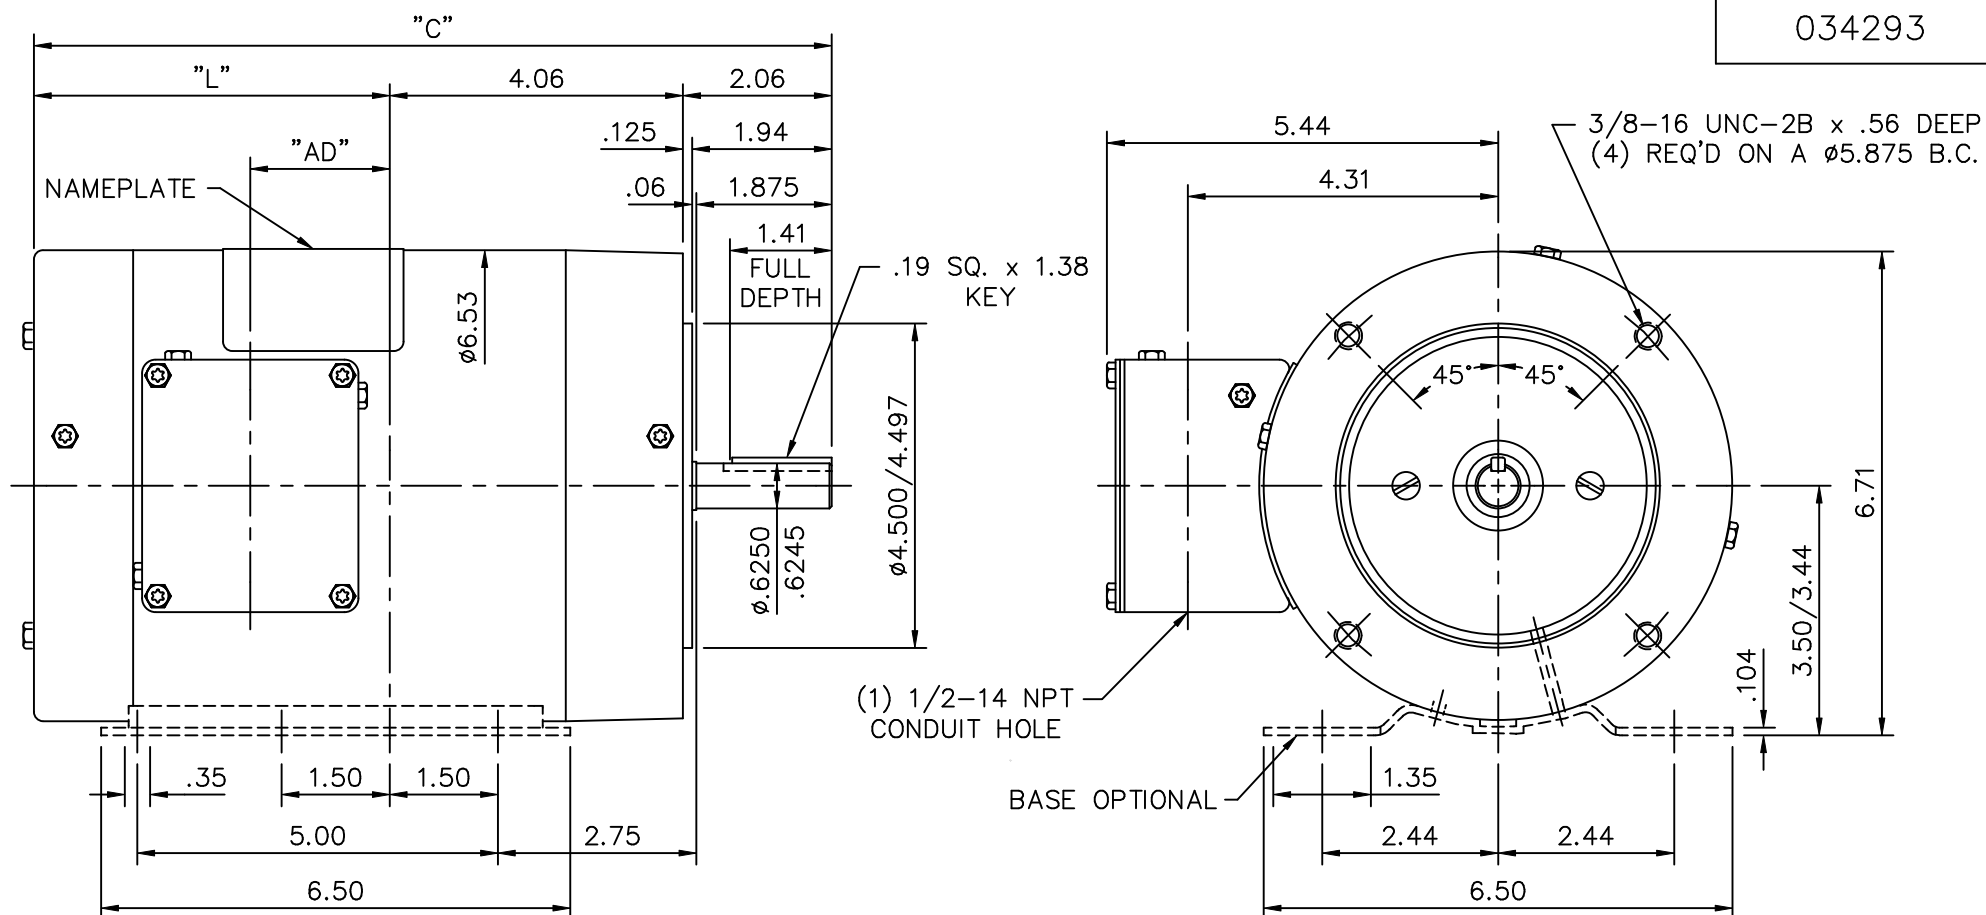

WASHGUARD II/BISSC MOTOR

SPECIAL FEATURES:
BUNA-N GASKETS THROUGHOUT
SHAFT SEAL & V-RING

DRAIN HOLES IN ENDBELLS & CONDUIT BOX
STAINLESS STEEL HARDWARE, FRAME & NAMEPLATE
CORROSION RESISTANT FINISH ON ENDBELLS & CONDUIT BOX

MAXIMUM FACE RUNOUT TO BE .004 T.I.R.
MAXIMUM PILOT ECCENTRICITY .004 T.I.R.
PERMISSIBLE SHAFT RUNOUT .002 T.I.R.

FRAME	"C"	"L"	"AD"
E56C	11.06	4.94	1.94
F56C	11.56	5.44	2.44
G56C	12.06	5.94	2.94
H56C	12.56	6.44	3.44
J56C	13.06	6.94	3.94

05	ADDED DRAIN HOLE IN C-FACE ENDBELL	ARV 3/4/06		TOLERANCES UNLESS SPECIFIED		 ELECTRIC MOTORS GEARMOTORS AND DRIVES	DRAWN PG 02/16/94
04	ADDED E56C FRAME	SAW 02/10/97	GS	DEC.	INCHES		CHK
03	FINISH ON ENDBELL & CONDUIT BOX WAS HARDCOAT	TMZ 11/07/96		.X	±.1		APPD CC 02/21/94
	ANODIZED			.XX	±.03		SCALE 3=8
02	DIMENSION 1.35 WAS 1.22	KMM 11/21/94	PG	.XXX	±.005	OUTLINE - 56 FRAME C-FACE - BISSC MOTOR	REF 033694
01	ADDED BASE	PG 11/01/94		.XXXX	±.0005		FMF 114394.00
NO.	REVISION	BY & DATE	CHK	ANG	±1/2"	FINISH	PREV
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT				RFP	CAD FILE	034293	SIZE A
				DIST	DRAWING NO.		034293
							REV. 05