


034294

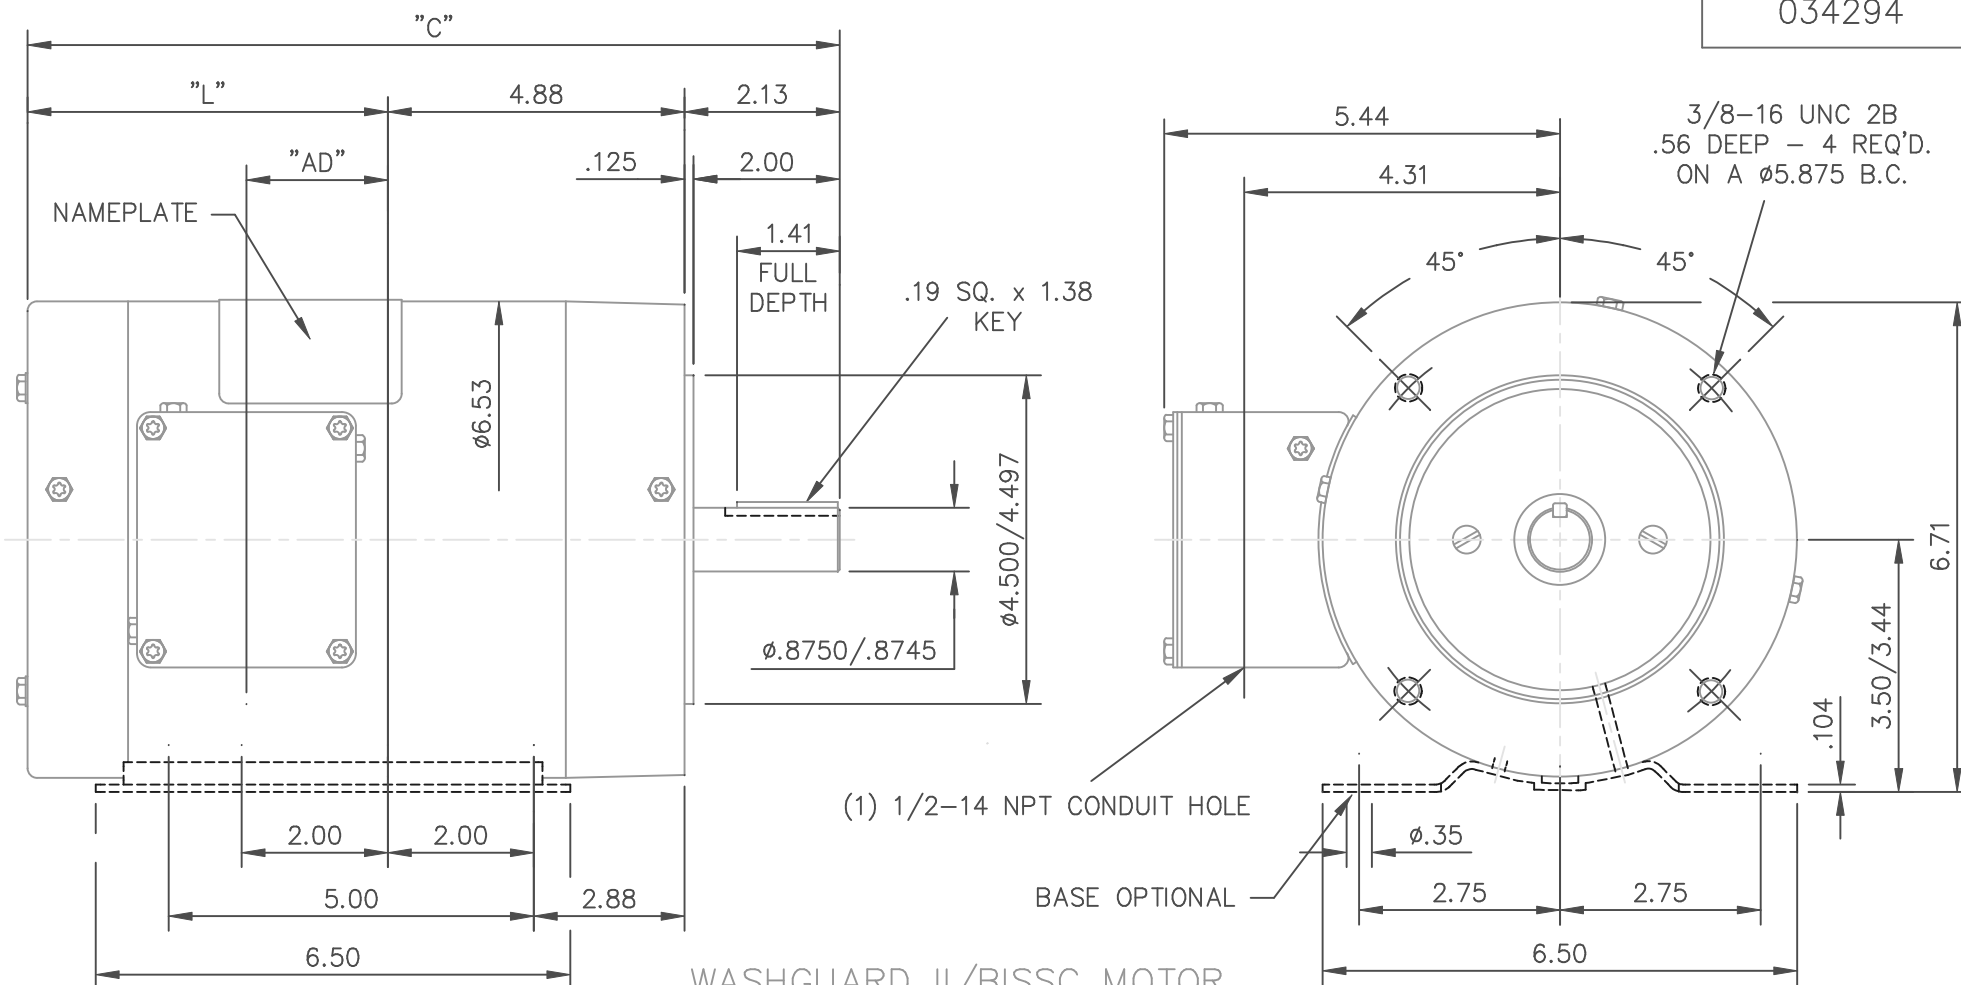

WASHGUARD II/BISSC MOTOR

SPECIAL FEATURES:

BUNA-N GASKETS THROUGHOUT
 SHAFT SEAL & V-RING
 DRAIN HOLES IN ENDBELLS & CONDUIT BOX
 STAINLESS STEEL HARDWARE, FRAME & NAMEPLATE
 CORROSION RESISTANT FINISH ON ENDBELLS & CONDUIT BOX

MAXIMUM FACE RUNOUT TO BE .004 T.I.R.
 MAXIMUM PILOT ECCENTRICITY .004 T.I.R.
 PERMISSIBLE SHAFT RUNOUT .002 T.I.R.

FRAME	"C"	"L"	"AD"
F140TC	11.63	4.63	1.63
G140TC	12.13	5.13	2.13
H140TC	12.63	5.63	2.63
J140TC	13.13	6.13	3.13

				TOLERANCES UNLESS OTHERWISE SPECIFIED		LEESON ELECTRIC CORPORATION		
				DECIMALS				
03	ADDED DRAIN HOLE IN C-FACE ENDBELL	ARV	3/4/06	.00	± .01	DRAWN PG 2/16/94	TITLE OUTLINE 140TC FRAME - BISSC MOTOR	
02	FINISH ON ENDBELL & CONDUIT BOX WAS HARDCOAT ANODIZED	TMZ	11/07/96	.000	± .005	CH'K'D.		
01	ADDED BASE	PG	11/1/94	.0000	± .0005	APPR. CC 2/21/94	MAT'L.	
NO.	REVISION	BY	DATE	FRACTIONS	± 1/64	SCALE .375=1		
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED				ANGLES	± 1/2°	REF. 033698	FINISH	SIZE
				INCH/MM		FMF 121109	STANDARD	A
				DRAWING NO. 034294				