

UNITS: INCHES

FRAME SIZE	MOTOR DIMENSIONS											CONDUIT BOX						MAXIMUM WEIGHT		
	A	B	C	D	G	J	K	M	O	P	T	AQ(NP)	AB	AC	AE	AF	XL		XN	
N587US	28.0	29.6	55.6	14.50	1.6	6.3	5.6	22.3	28.8	31.9	4.4	4.00	24.7	20.5	14.5	9.2	15.2	10.3		
N587UZ	28.0	29.6	62.4	14.50	1.6	6.3	5.6	22.3	28.8	31.9	4.4	4.00	24.7	20.5	14.5	9.2	15.2	10.3		
N587UZQ	28.0	29.6	62.4	14.50	1.6	6.3	5.6	22.3	28.8	31.9	4.4	4.00	24.7	20.5	14.5	9.2	15.2	10.3		
FRAME SIZE	MOUNTING											SHAFT EXTENSION			KEY SEAT			BEARINGS		
	E	2F	H	BA	N-W	V	U	R	S	ES	LS	OS								
N587US	11.50	25.00	1.2	10.00	4.75	4.50	2.875	2.450	0.750	3.00	6320C3	6320C3								
N587UZ	11.50	25.00	1.2	10.00	11.62	11.38	3.875	3.309	1.000	10.00	NU324C3	6320C3	4000 lbs.							
N587UZQ	11.50	25.00	1.2	10.00	11.62	11.38	4.375	3.817	1.000	10.00	NU324C3	6320C3								

CUSTOMER: _____ MOTOR MODEL NO.: _____ TAG NO's: _____

P.O. NO.: _____ HP: _____ VOLTAGE: _____ RPM(SYN.): _____ HZ: _____
 FRAME SIZE: _____ PRODUCT TYPE: IIEFC EGP III, EPACK, & HIGH EFFICIENCY QUARRY DUTY
 COMMENTS: _____

PER: _____ DATE: _____

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT AND THE DATA MAY CHANGE WITHOUT NOTICE PRELIMINARY
 DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS MARKED AS CERTIFIED CERTIFIED

- STANDARD (NO AUX. BOXES)
- RTD AUX. BOX
- SPACE HEATER AUX. BOX
- BEARING RTD's

- NOTES:
- DIMENSION V REPRESENTS LENGTH OF STRAIGHT PART OF SHAFT
 - MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS
 - KEY DIMENSIONS EQUAL S x S x 10.00 FOR UZ & UZQ AND S x S x 3.00 FOR US (MOTOR SUPPLIED WITH KEY)
 - MOTOR WEIGHT SHOWN IS MAXIMUM HORSEPOWER IN FRAME
 - STANDARD PRODUCT USE BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE

TOSHIBA
 TOSHIBA INTERNATIONAL CORPORATION

TOTALLY-ENCLOSED FAN-COOLED
 HORIZONTAL FOOT-MOUNTED
 3 PHASE INDUCTION MOTOR
 F1 ASSEMBLY

XT SERIES
 VISIT OUR WEBSITE AT:
 www.toshiba.com/ind

TYPICAL MOTOR PERFORMANCE DATA

Model: C2008FLF4OMQ

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
200	150	8	890	N587UZ	575	60	3	191
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	54	F	1.15	CONT	93.6	B	G	40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	200	149.1	191.0	93.6	83.5
¾ Load	150.00	111.9	168.4	94.5	80.6
½ Load	100.00	74.6	133.1	94.2	73.7
¼ Load	50.00	37.3	107.4	87.9	39.6
No Load			60.0		5.1
Locked Rotor			1160.00		27.3

Torque				Rotor wk ²
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	Inertia (lb-ft ²)
1180	215	165	205	180.25

Safe Stall Time(s)		Sound Pressure dB(A) @ 1M	Bearings*		Approx. Motor Weight (lbs)
Cold	Hot		DE	NDE	
25	13.5	-	NU324C3	6320C3	

*Bearings are the only recommended spare part(s).

Motor Options:
Product Family:Quarry
Mounting:Footed,Shaft:UZ Shaft

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.


Engineering	jaustin	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0
Engr. Date	7/22/2014	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011

SPEED TORQUE/CURRENT CURVE

Model: C2008FLF4OMQ

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
200	150	8	890	N587UZ	575	60	3	191
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	54	F	1.15	CONT	93.6	B	G	40 C
Locked Rotor Amps	Rotor wk ² Inertia (lb-ft ²)	Torque				Pull Up (%)	Break Down (%)	
		Full Load (lb-ft)	Locked Rotor (%)					
1160.00	180.25	1180	215		165	205		

Design Values

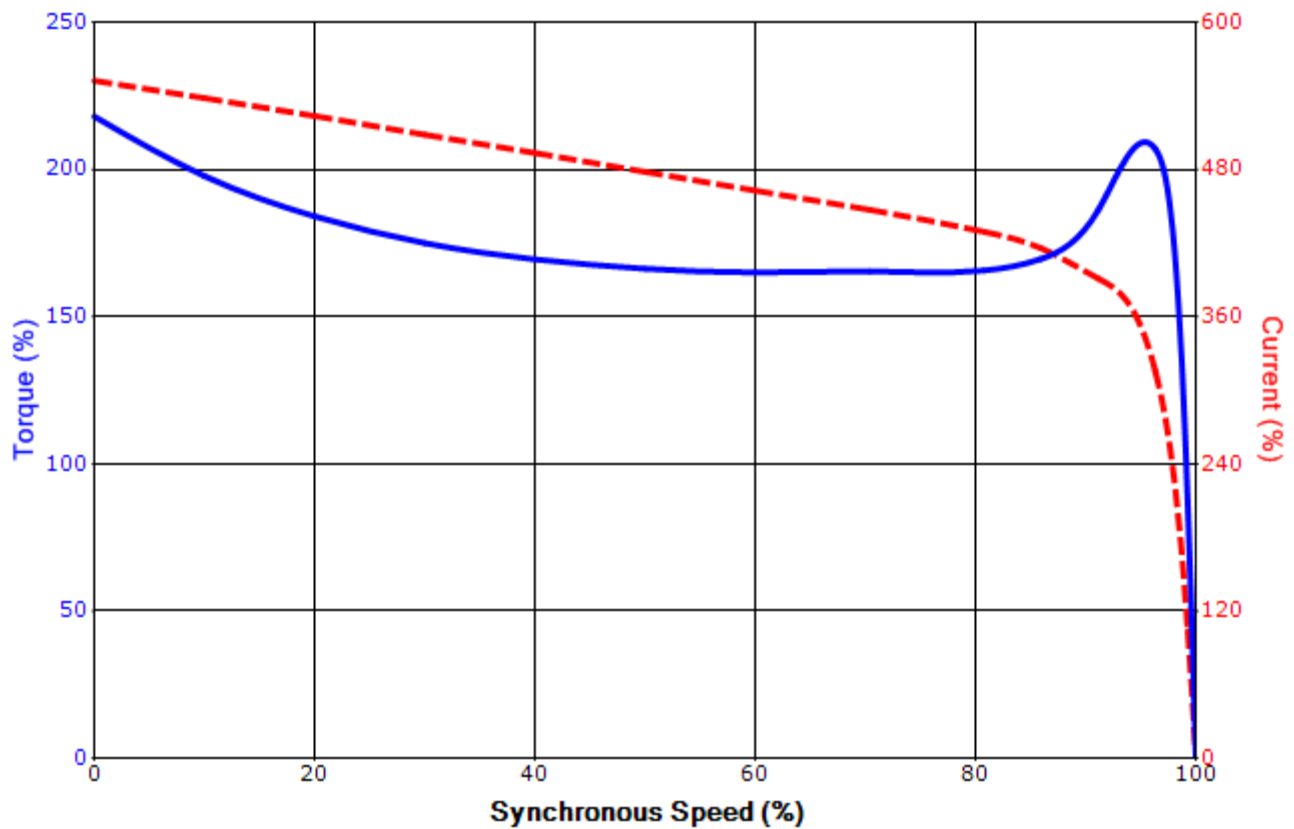

Customer		wk ² Load Inertia (lb-ft ²)	-
Customer PO		Load Type	-
Sales Order		Voltage (%)	100
Project #		Accel. Time	-

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

Engineering	jaustin	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121 / 0
Engr. Date	7/22/2014	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011

Motor Connection Diagrams
6 Leads

Across the Line Starting / Run - Delta:



Alternate Starting Connection - Wye:



Switch L1 and L2 to reverse rotation