



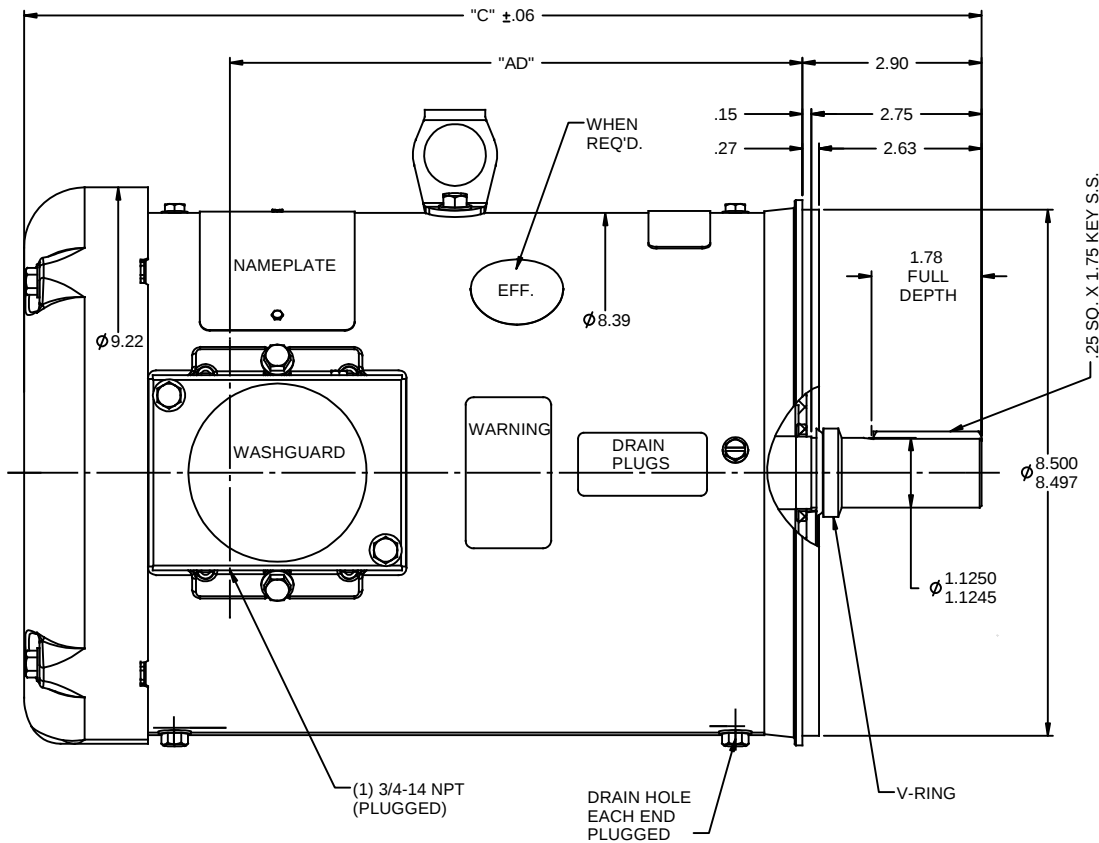

DECAL-
CONNECTION
UNDER COVER
WHEN REQ'D.

(4) 1/2-13 UNC-2B X .75 DEEP
ON A Ø7.250 B.C.

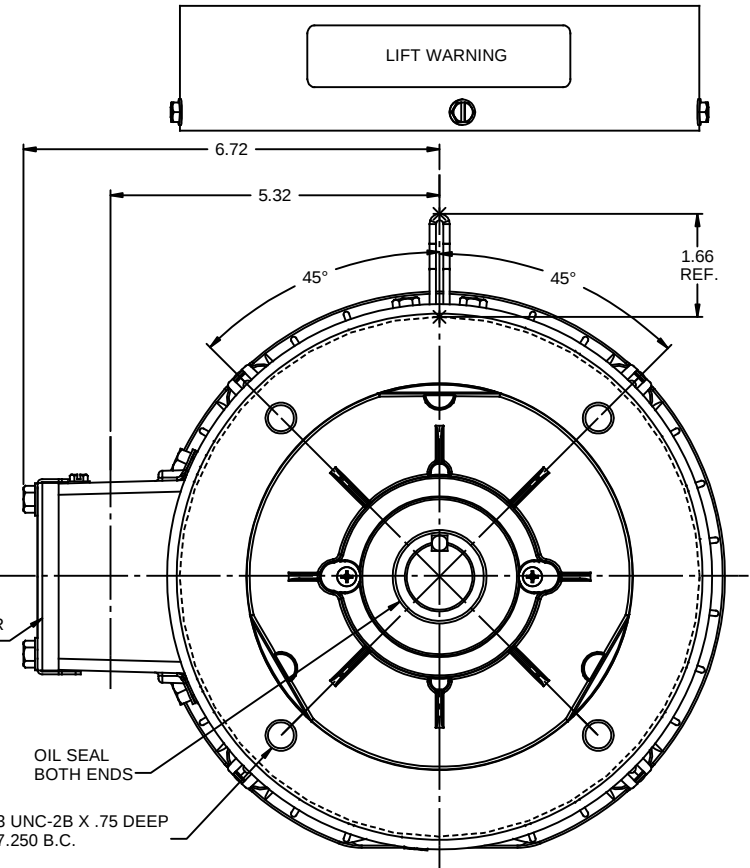

SPECIAL FEATURES:

SHAFT SEAL & V-RING
 DRAIN HOLES IN FRAME & CONDUIT BOX
 STAINLESS STEEL SHAFT, HARDWARE & NAMEPLATE
 GASKETS THROUGHOUT

DASH NO.	"C"	"AD"
900	14.47	8.25
950	14.97	8.75
1000	15.47	9.25
1050	15.97	9.75
1100	16.47	10.25
1150	16.97	10.75

MAXIMUM FACE RUNOUT TO BE .004 T.I.R.
 MAXIMUM PILOT ECCENTRICITY TO BE .004 T.I.R.
 PERMISSIBLE SHAFT RUNOUT TO BE .002 T.I.R.

				TOLERANCES UNLESS SPECIFIED		DRAWN RDW 2/19/03	
				DEC INCHES		CHK	
				X ±.1	TITLE OUTLINE - 180TC FRAME TEFC - "C" FACE	APPR SW 2/19/03	
				.XX ±.03		SCALE 1:2	
03	UPDATE PER ISAAC 10-0580	LST 5/12/2010	XX	.XXX ±.005	REF		
-	UPDATED & REDRAWN IN SOLIDWORKS	LST 11/17/2009	XX	.XXX ±.0005	FMF		
NO	REVISION	BY & DATE	CHK	ANG ±1/2"	FINISH	PAGE	OF
				RFP	PREV	SIZE	DRAWING NO
				THIRD ANGLE PROJECTION	NETWORK FILE NAME 035461	B	035461
							REV 03