



A Regal Brand

Catalog # : LM22654

Product Type: AC MOTOR

Description: 3/4,1800,TEFC,56,3/60/230/460

Model: SRF4S0.75T61Q40

Stock: Non Stock

Quote: Price:

Date: 10/15/2014



A Regal Brand

Catalog # : LM22654

Product Type: AC MOTOR


Description: 3/4,1800,TEFC,56,3/60/230/460

Model: SRF4S0.75T61Q40


Stock: Non Stock

Engineering Data					
Volts	230	Volts	460	Volts	
F.L. Amps	3	F.L. Amps	1.5	F.L. Amps	
S. F Amps		S. F Amps		S. F Amps	
RPM	1800	Hertz	60		
HP	3/4	Duty	CONTINUOUS	TYPE	TS
KW	.56				
Frame	56	Serv. Factor	1.0	Phase	3
Max Amb	40	Design	B	Code	L
Insul Class	F	Protection	NOT	Therm.Prot.	
Eff 100%	75.5	Eff 75%		PF	66.3
UL	V-OVER TEMP PROT 3, P1-P2	CSA	Yes	Bearing OPE	203
CC Number	EXEMPT	CE	Yes	Bearing PE	203
Load Type		Inverter Type	NONE	Speed Range	NONE
Motor Wt.	32 LB	Enclosure	TEFC	Lubrication	STANDARD
Nameplate		Mounting	RIGID	Rotation	REV
Assembly		Shaft Dia.		Ext. Diag.	A-EE7308T-LN
Cust Part No		Outline	A-100086LN-656	Ext. Diag2	
Packaging	B	Outline Dash No		Winding	ZT411
Carton Label				GROUP :	3
Iris		Paint	STANDARD	Test Card	
Form Factor		RMS Amps		Const Torque	Speed Range
Torque		Peak			
AB Code		Peak@DegC			
Resistance					
Connection					
Rework Status		Rework TYPE			

Hazardous Loc		NONE						Brake Motors			
Explosion Proof				Temp Op Code				FORCE			
Class				GROUP				VDC			
Class				GROUP				ADC			
										Brake Coil OHMs @25 C	
Performance											
Torque UOM						Inertia (WK²)					
Torque											
CURRENT (amps)											
Efficiency (%)											
PowerFactor											
Load Curve Data @60 HzVolts,3/4Horsepower											
Load	Amps	KW		RPM	Torque		Eff		PF	Rise By Resis	Frame Rise
0.0	1.05	0.11		1800	0.0		0.0		13.0	0.0	-
0.25	1.1	0.25		1786	0.52		55.5		29.0	0.0	-
0.5	1.15	0.4		1772	1.15		71.0		45.5	0.0	-
0.75	1.25	0.55		1760	1.65		74.0		57.0	0.0	-
1.0	1.5	0.72		1730	2.28		75.5		66.3	41.0	-
1.25	1.6	0.88		1725	2.85		78.5		73.0	0.0	-
1.5	1.7	1.1		1710	3.45		78.5		77.5	0.0	-
2.0	2.2	1.5		1670	4.7		76.5		83.5	0.0	-
1.0	1.5	0.72		1730	2.28		0.0		0.0	0.0	-
										SOURCE: CALCULATED GROUP: 3	
Load Curve Data @60HzVolts,3/4Horsepower											
Load	Amps	KW		RPM	Torque		Eff		PF	Rise By Resis	Frame Rise
Load Curve Data Not Available											
		Quote:		Price:							
		Date: 10/15/2014									

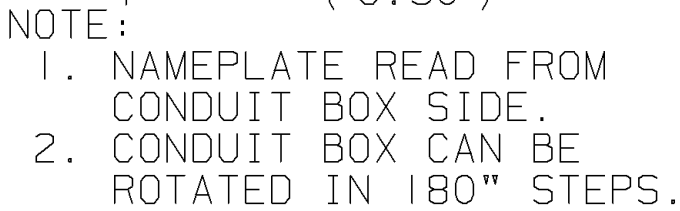

					✓ UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOL. ON XX± .03 XXX± .005 XXXX± .0005 ANGLES± 7'30"				
					MAX. SURFACE ROUGHNESS UNLESS OTHERWISE NOTED		DRAWN BY BLR	06-07-1999	
					FINISH		CHKD BY		
I		NEW DRAWING	BLR		MATERIAL		APPD BY		
REV	DATE	CHANGE	NAME	PART NAME OUTLINE 56 FR. - TEFC				DRWG NO A - 100086LN	

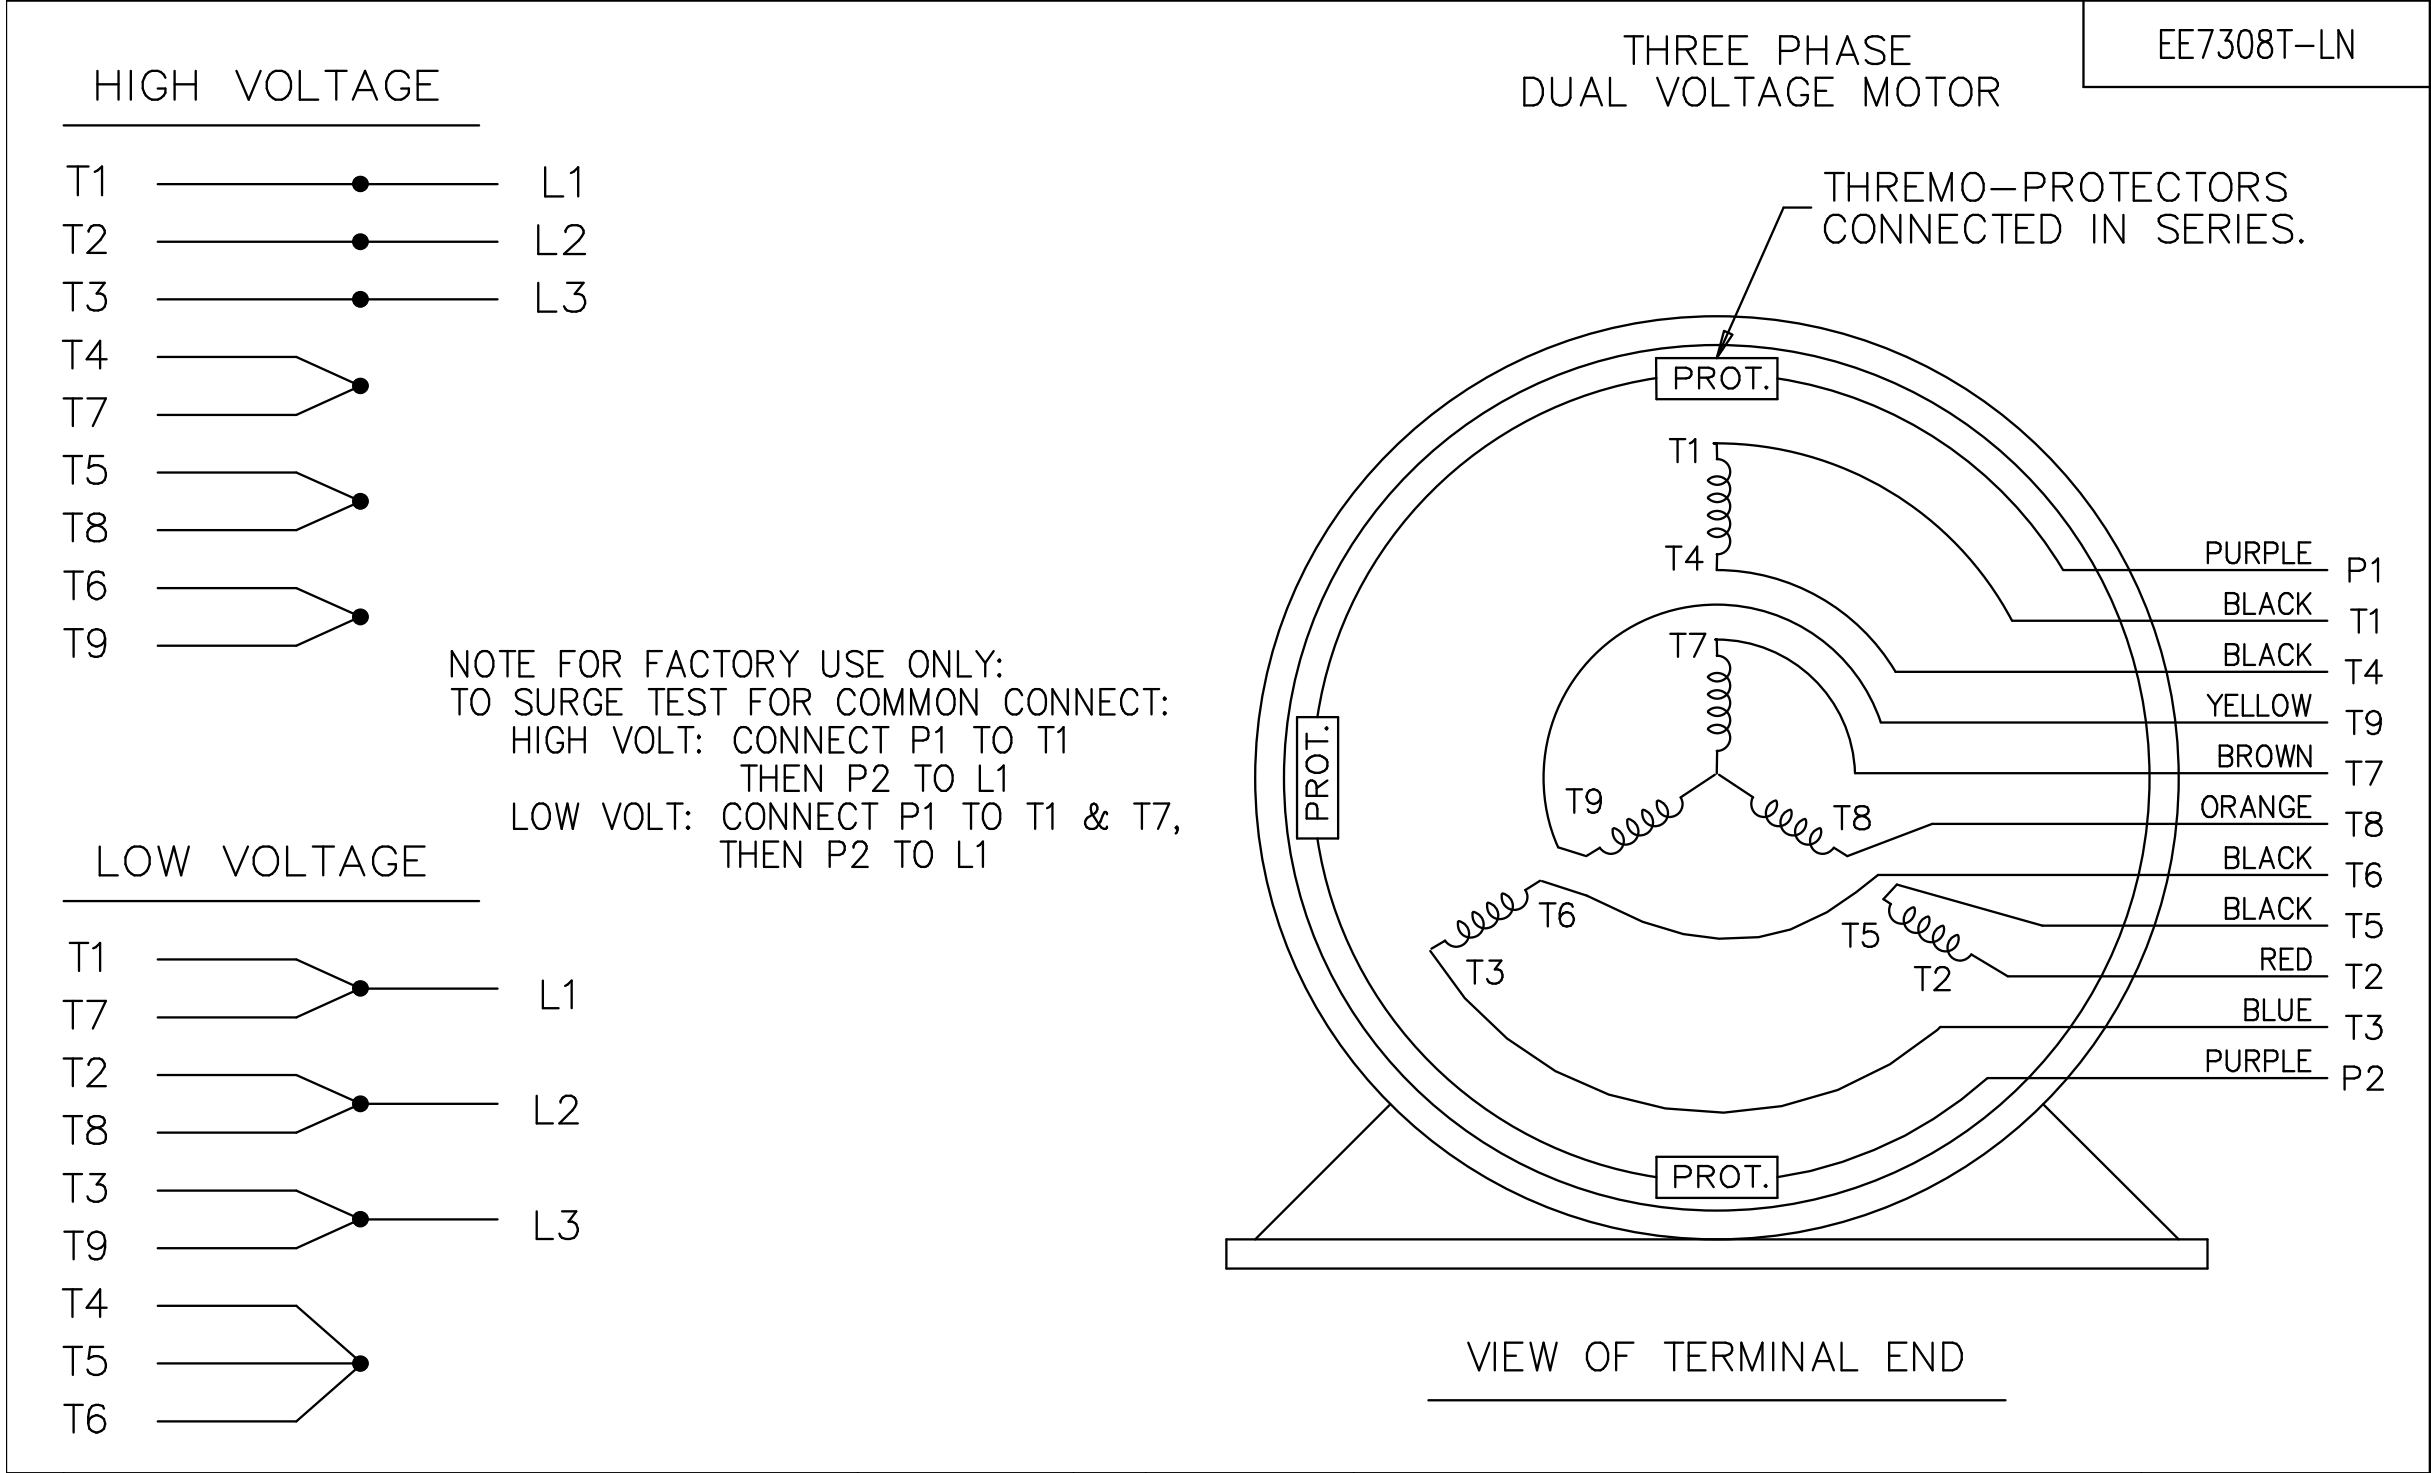

				TOLERANCES UNLESS SPECIFIED			DRAWN BJK 07-16-2002			
				DEC.	INCHES		CHK	DRS	07-18-2002	
				.X	±.1		APPD	GK	07-18-2002	
				.XX	±.02		SCALE 1=1			
2	ADDED COLORS TO "T & P" LEADS CN 40494	MSG 08-08-2006	ML	.XXX	±.005	TITLE CONNECTION DIAGRAM 3 PHASE – DUAL VOLTAGE MOTOR			REF	
1	NEW DRAWING	BJK 07-18-2002	DRS	.XXXX	±.0005	MAT'L.			FMF	
NO.	REVISION	BY & DATE	CHK	ANG	± 7'30"	FINISH			PREV	
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT – DO NOT SCALE THIS PRINT			RFP		CAD FILE ee7308t_ln		SIZE	DRAWING NO.	PAGE OF	REV.
			DIST LB				A	EE7308T-LN		2