

UNLESS OTHERWISE SPECIFIED DIMENSIONS WITHOUT TOLERANCES ARE REFERENCE ONLY


NOTES

- 1. WIRENUTS INCLUDED UNDER CONDUIT COVER.

LEADS


TERMINAL BLOCK PLUS GROUND

EXTERNAL CONNECTIONS

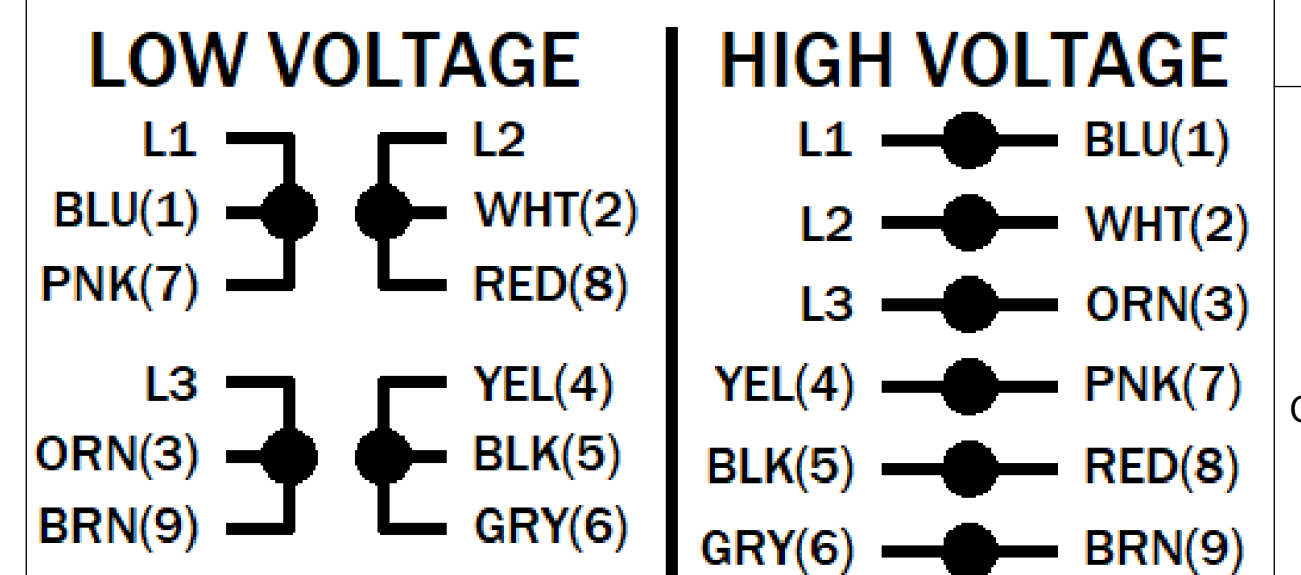

MOTOR DATA

TYPE		POLY - INVERTER DUTY		SHAFT MATERIAL		303 S.S. EXTENSION		CUSTOMER NAME		WEG	
HZ		60		HZ		50		FRAME		143/5TC	
VOLTS		230/460		VOLTS		190/380		ENCLOSURE		TENV	
HP[kW]		1.0 []		SF		1.00		ENVIRONMENT		WASHDOWN	
RPM		1750		RPM		1460		I.P.CODE		IP69K	
F.L. AMPS		3.1/1.55		F.L. AMPS		2.94/1.47		NEMA NOM. EFF.		85.5%	
S.F. AMPS		-		S.F. AMPS		-		IE2		77.1%	
TIME RATE		CONT		MAX AMB		40		ASSEMBLY VOLTAGE		HIGH	
KVA CODE		N		INS CLASS		F		THERMAL PROTECTION TYPE		NONE	
								MOUNTING POSITION		ALL POSITIONS	
								WINDING AND TEST SPEC		338419	
								DRAWN: AZAHM		01/29/25	

ECN	REV	CHANGE DESCRIPTION	DATE/INITIALS
-	03	UPDATE IE AND IE EFFICIENCY.	07/14/2025 ZM
<p>THE INFORMATION DISCLOSED HEREIN INCLUDES PROPRIETARY RIGHTS OF WEG. ANY REPRODUCTION OR TRANSFERRAL OF INFORMATION FROM THIS DOCUMENT IS FORBIDDEN WITHOUT PRIOR CONSENT.</p> 			
SIZE	DWG NO.		
D	10012729558		
SCALE: 1:1	DO NOT SCALE DRAWING	SHEET 1 OF 1	

F
E
D
C
B
A

F
E
D
C
B
A

10012729558